

# WT-ColorCoat

Four Layers of Protection Enhanced with Color



Wheatland Tube's WT-ColorCoat for fence framework offers four layers of protection. The galvanized coating, intermediate conversion coating, clear polymer coating and polyester coating together make WT-ColorCoat attractive, durable and dependable.

## WT-ColorCoat Colors

Wheatland's 3 mil polyester TGIC powder WT-ColorCoat meets or exceeds the coating requirements of ASTM F1043, "Standard Specification for Strength and Protective Coatings on Steel Industrial Chain Link Fence Framework."

WT-ColorCoat dark green and black colors are in compliance with ASTM F934, "Standard Specification for Standard Colors for Polymer-Coated Chain Link Fence Materials."

Available in  
2 standard colors:



Available with:

WT-40 | 0.065-0.055"

WT-20 | 0.065-0.055"

WT-15 | 0.065-0.055"


## Specifications for Polyester TGIC Powder Coating, ASTM F1043

<b>Thickness</b>	3 mils (0.0076 mm)
<b>Color</b>	ASTM F934
<b>Pencil Hardness</b>	2H, ASTM D3363
<b>Weathering</b>	1000 hours, ASTM D1499 weatherometer
<b>Adhesion</b>	Compliance with crosshatch test ASTM D3359
<b>Gloss</b>	(60°) 60-70, ASTM D523
<b>Impact</b>	160+ inch pounds, ASTM D2794



# Wheatland WT-ColorCoat: Additional Protection with an Enhanced Experience

## Four Layers of Protection

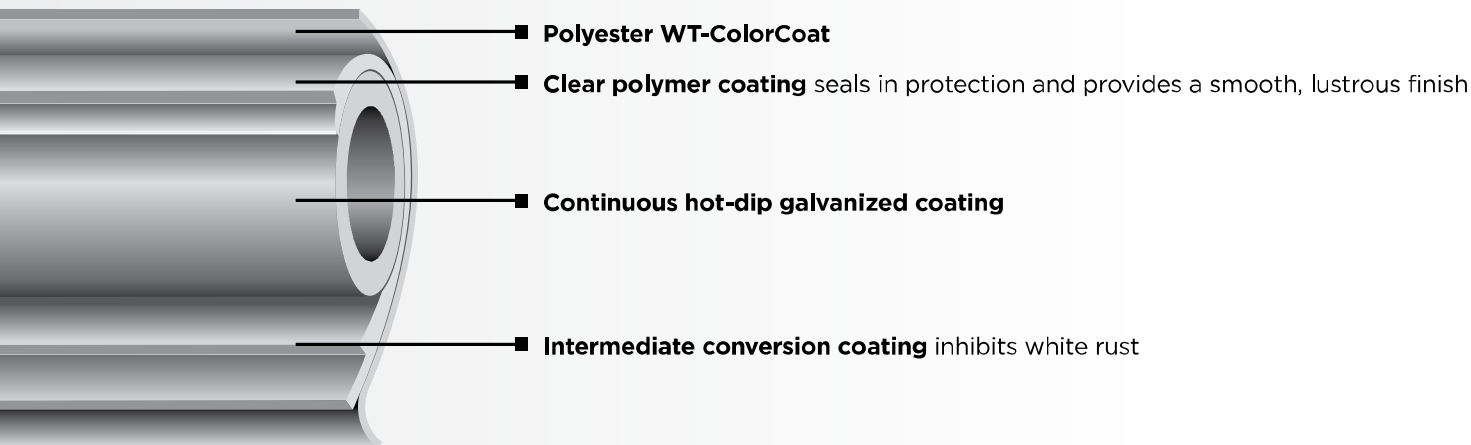

## WT-ColorCoat Fence Framework Specifications

PRODUCT	FENCE OD	DECIMAL EQUIVALENT	WALL THICKNESS	GAUGE	WEIGHT	PIECES LIFT
		in.	in.		lb./ft.	
Residential	1 3/8"	1.315	0.055	17	0.74	91
Residential	1 3/8"	1.315	0.065	16	0.87	91
WT-15	1 3/8"	1.315	0.072	15	0.96	91
Residential	1 5/8"	1.660	0.055	17	0.94	61
Residential	1 5/8"	1.660	0.065	16	1.11	61
WT-15	1 5/8"	1.660	0.072	15	1.22	61
WT-20	1 5/8"	1.660	0.085	14	1.43	61
WT-40	1 5/8"	1.660	0.111	12	1.84	61
Residential	1 7/8"	1.900	0.055	17	1.08	61
Residential	1 7/8"	1.900	0.065	16	1.27	61
WT-15	1 7/8"	1.900	0.072	15	1.41	61
WT-20	1 7/8"	1.900	0.090	13	1.74	61
WT-40	1 7/8"	1.900	0.120	11	2.28	61
Residential	2 3/8"	2.375	0.055	17	1.36	37
Residential	2 3/8"	2.375	0.065	16	1.6	37
WT-15	2 3/8"	2.375	0.072	15	1.77	37
WT-20	2 3/8"	2.375	0.095	13	2.31	37
WT-40	2 3/8"	2.375	0.130	10	3.12	37
WT-20	2 7/8"	2.875	0.110	12	3.25	30
WT-40	2 7/8"	2.875	0.160	9	4.64	30
WT-40	3 1/2"	3.500	0.160	8	5.71	19
WT-40	4"	4.000	0.160	8	6.56	19

For more information, contact our Fence Sales Department at **800.343.0124** or email [info@wheatland.com](mailto:info@wheatland.com)

Check out our Fence Post Wind Load Calculator at [wheatland.com/wind-load](http://wheatland.com/wind-load)

