




Swing for the Fences

12 models: 400 to 15,000 lb

Choose the Perfect Nice/HySecurity LA Swing Gate

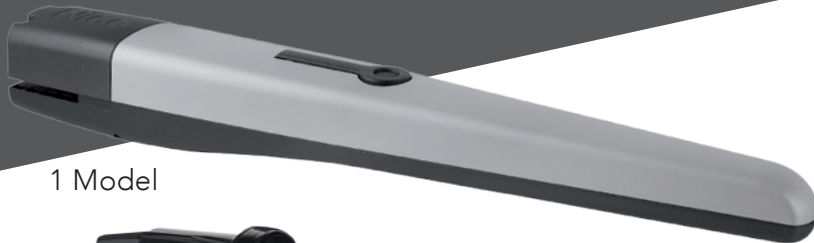


1 Model




3 Models



2 Models

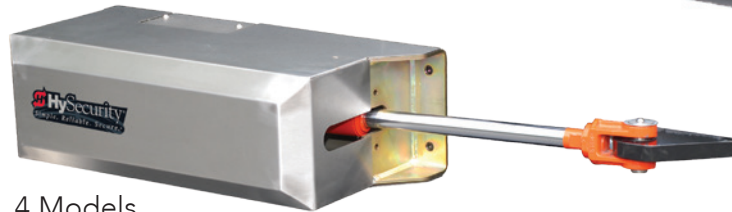

4 Models

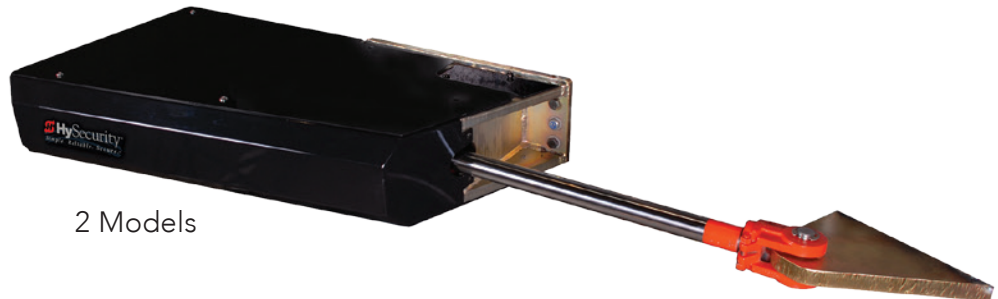

2 Models



EAGLE FENCE
★ DISTRIBUTING LLC ★



Rural • Solar • Residential • Utility • Estate • High Security



Nice **1724**

Blue BUS 12 Volt

Residential



1724: 1050US board, MB1050 control box, 512-1 arm

- Move up to 400 lb/14 ft gate leaf
- Single or dual gate applications
- Accessible compartment for easy installation and maintenance. External quick release with keyed access for security
- Powered by two 12V batteries kept charged by an AC power supply connected to a 120VAC power source
- Retain full functionality during an AC power outage. Fully charged batteries will provide up to 200 cycles on a basic system before requiring a recharge
- 2 year warranty

1724

Residential
1050 control board
14 ft leaf (4 m)
up to 400 lb (181 kg)
14-16 second open

Nice **1500/1550/1551**

Blue BUS 12 Volt

Farm/ranch and Residential



1550: 936US Board, CBOX, 816 arm

- Move up to 600 lb/16 ft gate leaf
- Perfect for AC or Solar applications*
- Single or dual gate applications
- Easy to install and low maintenance
- Proven reliability and durability. More than 100,000 installations
- Corrosion resistant acme screw drive mechanism
- NEMA 3R class environmentally sealed enclosure
- All weather performance
- 2 year warranty

1500

Farm/Ranch Only
636 control board
16 ft leaf (5 m)
600 lb leaf (272 kg)
14-16 second open

1550

936 control board
16 ft leaf (5 m)
600 lb leaf (272 kg)
14-16 second open

1551

1050 control board
16 ft leaf (5 m)
600 lb leaf (272 kg)
14-16 second open

* Battery required for operation, not included



Nice **TITAN12L/12L1** Blue BUS 12 Volt

Residential



TITAN12L1: 1050US Board, CBOX, 912L-1 arm

- Move up to 600 lb/20 ft gate leaf or 1,000 lb/8 ft gate leaf
- Perfect for AC or Solar applications*
- Single or dual gate applications
- Convenient access to limit switch adjustment, secured under locking cover
- Keyed manual operation
- Engineered for quiet operation and smooth start and stop control
- Modular design with simple field replaceable components
- 2 year warranty

TITAN12L

Residential/Farm/Ranch
936 control board
600 lb/20 ft leaf (272 kg/6 m)
1000 lb/8 ft leaf (453 kg/2.4 m)
14-16 second open

TITAN12L1

Residential/Farm/Ranch
1050 control board
600 lb/20 ft leaf (272 kg/6 m)
1000 lb/8 ft leaf (453/2.4 m)
14-16 second open

* Battery required for operation, not included

HydraSwing

Industrial and High Security



HydraSwing 40, 80F: Smart Touch Board, HydraSupply

- Move up to 15,000 lb/40 ft gate leaf
- Industrial grade components for extremely low maintenance and exceptionally long life
- Graceful, smooth swing
- Dual gate, sally port or sequenced gate integration
- Simplify troubleshooting with online events log
- Field programmable to specific site requirements
- Real time system security alerts with optional HyNet™ Gateway
- 5 year warranty

HydraSwing 40/Twin

4,000 lb (1,814 kg) gate
up to 24 ft (7.3 m) wide
up to 16 ft (5 m) wide Twin
15-20 second open

HydraSwing 40F/Twin

4,000 lb (1,814 kg) gate
up to 16 ft (5 m) wide
10-15 second open

HydraSwing 80F





8,000 lb (3,629 kg) gate
up to 30 ft (9 m) wide
15-25 second open

HydraSwing 150

15,000 lb (6,804 kg) gate
up to 40 ft (12 m) wide
20-30 second open

Linear Actuators for all applications

Control board features:

 1500	 1550 TITAN12L	 1724 1551 TITAN12L1	 HydraSwing 40, 40F, 40Twin HydraSwing 80F HydraSwing 150
636US	936US	1050US	Smart Touch
<ul style="list-style-type: none"> • Excellent for solar applications • Simple to install and configure 	<ul style="list-style-type: none"> • Excellent for solar applications • Simple to install and configure • Supports up to 1,000 Inti or Era One remotes with rolling-code security • Nice BlueBUS 2-wire technology self-identifies monitored photo eyes • Smart battery charging management • Plug & play retrofit of 600 and 800 series board • UL325 Class I, II 	<ul style="list-style-type: none"> • Excellent for solar applications • Simple to install and configure • Supports up to 1,000 Inti or Era One remotes with rolling-code security • Nice BlueBUS 2-wire technology self-identifies monitored photo eyes • Smart battery charging management • Full featured controller configures over 100 different options • LCD display for detailed user feedback • Internal 7 day programmable timer • Surge protection • Built in solar regulator and charger • UL325 Class I, II 	<ul style="list-style-type: none"> • Patented Anti-Tailgate mode • Ample user inputs • Solid state and SPDT installer configurable relay outputs for many interface options • Optional plug-in Hy5B vehicle detectors. • USB and RS-232 for connection to laptop • Dual gate, sally port or sequenced gate integration • RS-232, RS-485, Ethernet/fiber using optional HyNet™ Gateway accessory • Configurable “warn before operate” buzzer • Configure operator with keypad, or laptop computer using S.T.A.R.T. software • Power surge/lightning strike protection • UL325 Class I, II, III, IV

Optional Accessories for 1500, 1550, 1551, TITAN12L/12L1



EPMB/A
EPMOB/A
EPLOB/A
Photoeye Kits



EDSWG/A
Keypad



OVIEW/A



Inti 2-channel
transmitter



Era One 2 or
4 channel
transmitter



Solar panels



Battery Charger

Optional Accessories for HydraSwing



Hy5A Vehicle
Detector



Edge Sensors



Photo Eye Kits



Radio Receivers &
Transmitters



Clock Timer



Hy8Relay



HyNet™ Gateway
Integration

SYSTEM DESIGN SUPPORT: Contact Nice/HySecurity for CAD drawings, tech manuals, help with custom site requirements or other specifications support. Call to speak with a Nice/HySecurity representative today.

VISIT WWW.NICEFORYOU.US or WWW.HYSECURITY.COM for specifications, installation manuals, wiring diagrams, parts diagrams, image gallery, videos, training and much more.



Contact Nice/HySecurity Regional Sales Manager for an operator/parts distributor near you.
phone **210-545-2900** | **800-226-0178** | www.niceforyou.us | orders@niceforyou.com
phone **253-867-3700** | **800-321-9947** | www.hysecurity.com | orders@hysecurity.com