

**QUIKRETE®**

# ***TOTAL PROGRAM***

**PRODUCTS  
THAT LAST  
COME FROM  
COMPANIES  
THAT DO.**



**EAGLE FENCE**

★DISTRIBUTING LLC★  
efdistribution.com

# **PROFIT MANUAL & PRODUCT GUIDE**

[www.quikrete.com](http://www.quikrete.com)



# TABLE OF CONTENTS

■ REACHING YOUR CUSTOMER .....	3
■ SUPPORTING YOUR SALES TEAM .....	11
■ NEW PRODUCTS .....	14
■ PROFESSIONAL & TECHNICAL SUPPORT....	15
■ CONCRETE MIXES .....	17
■ MORTAR & MASONRY PRODUCTS .....	18
■ PORTLAND & MASONRY CEMENTS .....	20
■ CONCRETE REPAIR & WATERPROOFING .....	21
■ CRACK SEALERS & CAULKS .....	23
■ POLYURETHANE SEALANTS & ADHESIVES .....	24
■ EPOXY ANCHORING & EPOXY CONCRETE REPAIR .....	25
■ SURFACE PREPARATION & CLEANERS .....	26
■ SEALERS & ADDITIVES .....	27
■ CONSTRUCTION & RESTORATION PRODUCTS .....	29
■ DOT REPAIR MATERIALS .....	31
■ UNDERLAYMENTS & THINSETS .....	32
■ STUCCO PRODUCTS .....	33
■ SANDS & AGGREGATES .....	35
■ HARDSCAPES by QUIKRETE® .....	37
■ DECORATIVE CONCRETE STAINS .....	38
■ BLACKTOP PRODUCTS .....	39
■ CONCRETE & MASONRY COATINGS .....	39
■ FLOOR COATINGS .....	40
■ CONCRETE ACCESSORIES .....	41
■ WINTER PRODUCTS .....	42





A construction worker wearing a bright green t-shirt and dark, worn-in jeans is bent over, working on a construction site. The background is a blurred view of a construction area with various materials and structures.

**PRODUCTS  
THAT LAST  
COME FROM  
COMPANIES  
THAT DO.**

Since 1940, The **QUIKRETE®** Companies has served the construction and home improvement industries. The **QUIKRETE®** brand is the most respected and trusted brand of cement and concrete products in the United States.

With more than 100 manufacturing locations throughout the United States, Puerto Rico, Canada, Central and South America, The **QUIKRETE®** Companies is committed to providing reliable, high performance and innovative products for the contractor and homeowner.



# REACHING YOUR CUSTOMER

The **QUIKRETE®** Company continues to reinforce and grow its market leadership position with a comprehensive advertising and public relations program. In fact, The **QUIKRETE®** brand will reach **more than 66% of your customers** over three times, generating more than **1,000,000,000** impressions during the selling season.


The **QUIKRETE®** Company utilizes home improvement and sports-oriented cable television, nationally syndicated radio, magazines, online advertising and social media to inspire your customers with concrete project ideas and drive product trial.

The **QUIKRETE®** Company sponsors and conducts ongoing consumer and professional research to determine brand awareness, project sources of inspiration and instruction, purchasing patterns, industry trends and identify future consumer project plans.

## ONLINE ADVERTISING

Research shows that **80% of consumers use the Internet for various home improvement needs (86% of users gathered product information, 62% searched for project ideas).**

The **QUIKRETE®** Company's vast online advertising presence includes Handy.com, Radium One, Weatherbug.com, BobVilla.com, Homemade-Modern.com, TheMoneyPit.com, Todayshomeowner.com, ThisOldHouse.com, DIY.com, Hometime.com and Weather.com. Banner ads and online Advertising drive consumers to the **QUIKRETE.com** website for how-to project videos, project ideas and the product information they need.

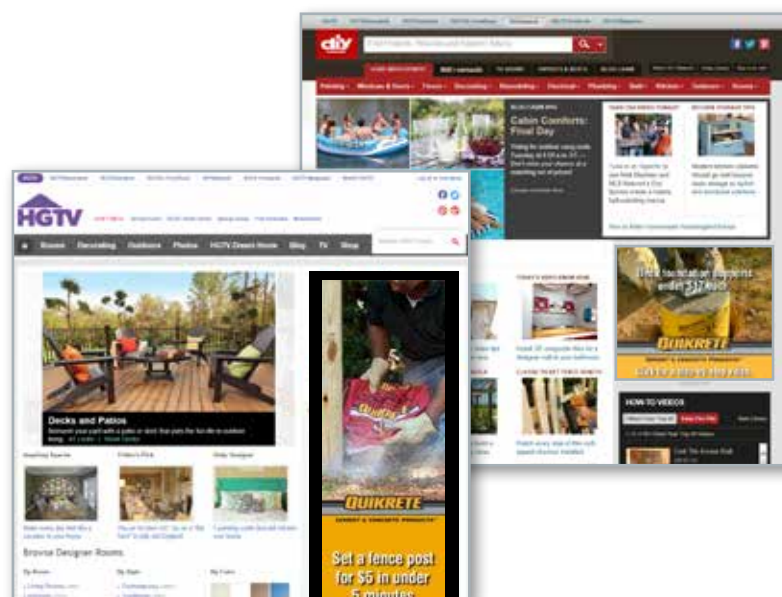

**“Banner Ads and Online Advertising Drive Customers to the QUIKRETE.com website”**



## HOME IMPROVEMENT



95.6 million HH



60.9 million HH



85 million HH  
(Syndicated)



PBS: 40 million HH  
250 Syndicated TV Stations



70 million HH

## GENERAL INTEREST



## SPORTS



94.4 million HH



73.5 million HH



83.02 million HH



79 million HH

Image from  
"Fast-Setting Concrete Origami"  
TV spot.



## NATIONAL RADIO

Millions of listeners are inspired and educated by **QUIKRETE®** for home improvement projects by home improvement radio shows. National syndicated radio shows regularly promote and endorse **QUIKRETE®** on their websites and social media networks.



Weekly on 280 stations,  
XM Radio & Podcast



Weekly on 262 stations, XM  
Radio stations & a Podcast



115 stations



Weekly on 117 stations  
plus online streaming stations

## PRINT ADVERTISING

### TRADE PRINT

#### Concrete and Masonry Professionals

Total Circulation: over 300,000

- Masonry Magazine
- Concrete Construction
- Concrete Contractor
- Concrete Repair Bulletin
- Roads & Bridges
- Shotcrete
- Walls & Ceilings
- Public Works

#### Builders and Remodelers

Total Circulation: over 1,200,000

- Builder
- Professional Builder



#### Architects and Engineers

Total Circulation: nearly 30,000

- The Construction Specifier





**QUIKRETE.com** is the premier resource for homeowners & construction professionals for product and project information. The mobile optimized site delivers product and project information at home, in the office, on the jobsite and in the aisle.

## FOR HOMEOWNERS:


The “For Homeowners” path provides concrete, masonry and stucco project ideas, product selection information and step-by-step instructions for the homeowner. Affordable homeowner projects and new products are featured monthly.

## FOR THE PRO:

Our “For The Pro” path offers concrete and masonry, stucco, road and bridge contractors, along with design professionals the information they need for their commercial, residential and municipal projects: including product performance data, MSDS information and guide specifications.




Homepage slides focus on key products and project features that professionals and homeowners want.

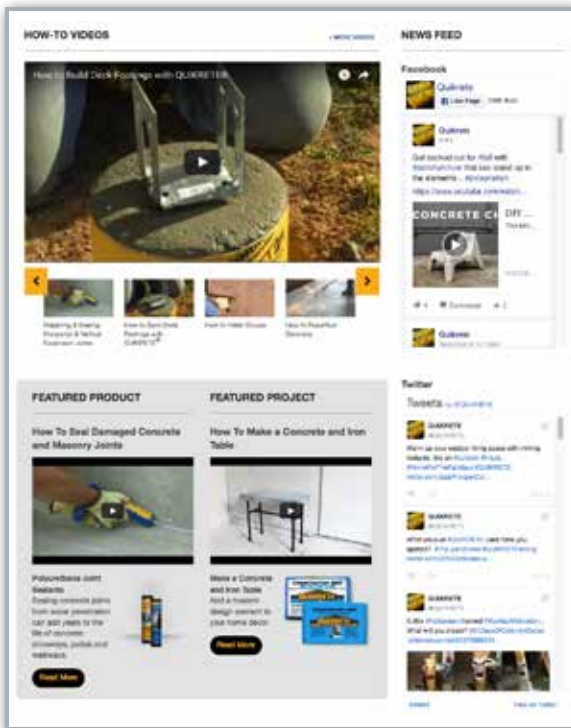

## NEW HOMEPAGE FEATURES:

- Live Social Media
- News Feeds
- Featured Home Improvement Projects
- Commercial Project Spotlight

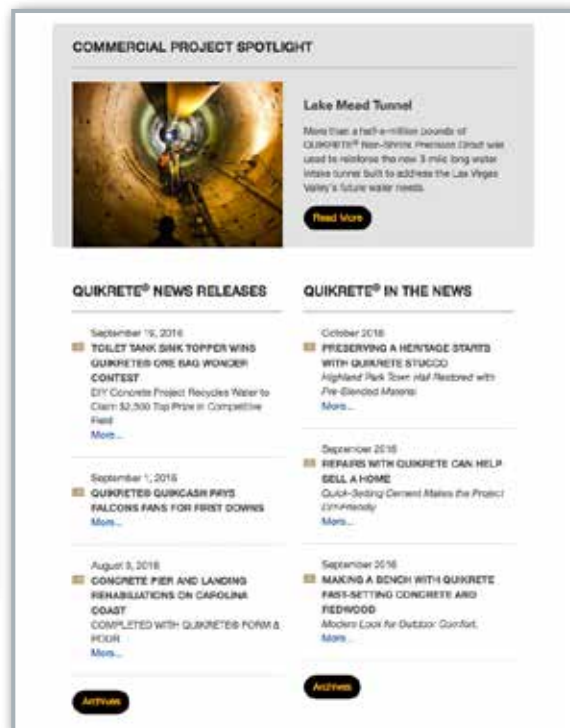




The **QUIKRETE.com - DEALERS ONLY Site** is a password-protected path that gives our customers exclusive online access to product and project images, advertising guidelines and copy points, scannable UPC guides and an extensive library of training modules.

Contact Your **QUIKRETE.com** Sales Representative for Your User ID and Password.

### Dealer's Only Resources

- **Ad Builder** - Images, Logos, Radio Spots and Advertising Copy Points
- **In-Store Merchandising** - In-Store Displays, Banners, Beam Signs and Signage
- **Sales Literature** - Brochures, Sell Sheets and Tear Pad Sheets
- **Employee Training Modules** - Training Units and Aids for a Variety of Best-Selling Products

### PASSWORD-PROTECTED DEALER LOGIN

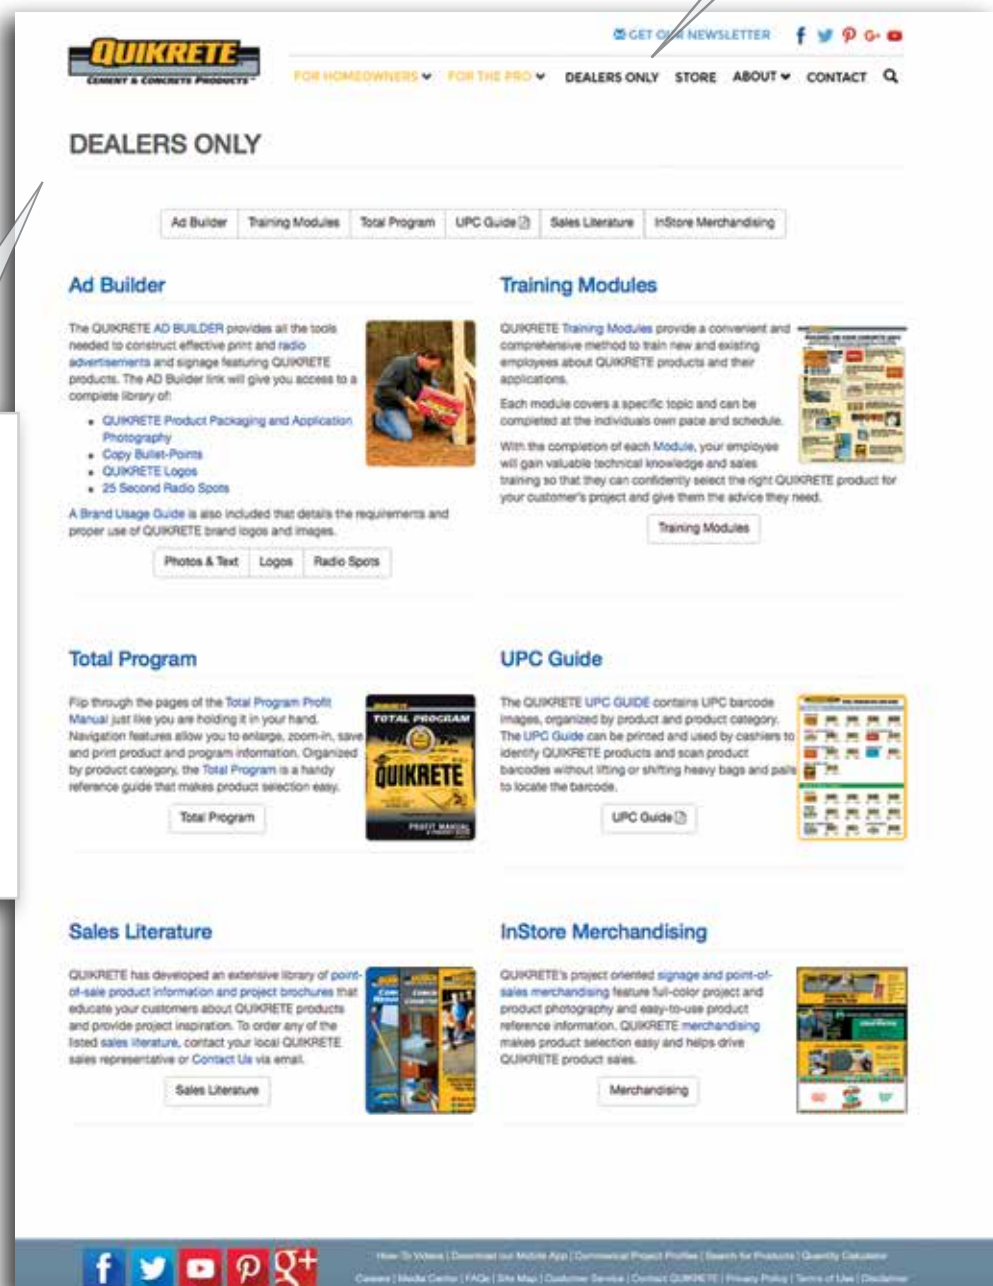

### AD BUILDER PROVIDES DOWNLOADABLE RESOURCES SUCH AS:

- Package and Application Photography
- High Resolution Logos
- Talking Points About **QUIKRETE®** Products



A survey by the Home Projects Council, a collection of reputable home improvement experts, identified how-to videos as the leading resource for home improvement project education and instruction. Understanding that trend, **The QUIKRETE® Company** has established a how-to video gallery to inspire project ideas and instill project confidence.

**QUIKRETE**  
CEMENT & CONCRETE PRODUCTS™

GET OUR NEWSLETTER

FOR HOMEOWNERS ▾ FOR THE PRO ▾ DEALERS ONLY ▾ STORE ▾ ABOUT ▾ CONTACT ▾

## HOW-TO VIDEOS

### Building and Repair Projects

A great way to view and understand your building or repair project before you get started. Find out just about everything you need to know by clicking one of the videos below. The addition of appropriately placed reinforcing steel in the form of rebar or welded wire mesh can increase the strength of almost any concrete project. Reinforcing wire or rebar is recommended for most shaped projects and is also useful for slabs.

- Repairing & Sealing Expansion Joints
- Applying Translucent Concrete Stains
- Pouring & Finishing Concrete Slabs
- Setting Posts without Mixing
- Building Deck Footings
- Resurfacing Concrete Slabs
- Building a Block Wall
- Making Thin Repairs to Damaged Concrete
- Repairing & Sealing Cracks in Concrete
- Building a Dry Stack Block Wall with QUIKWALL
- Veneer Stone Mortar Application
- Building a Stucco Wall
- Mixing Concrete - Hand Mixing
- Sealing & Waterproofing Cracks in Concrete
- Sealing & Waterproofing Damaged Mortar Joints
- Repairing Concrete with Zip & Mix Repair Mortar
- Anchoring Bolts, Railings & Rebar in Concrete with
- Building a Paver or Natural Stone Patio
- Repairing & Sealing Cracks & Holes in Stucco
- Mixing Concrete - Machine Mixing

### Design and Décor Projects

A great way to view and understand your design and décor project before you get started. Find out just about everything you need to know by watching one of the videos below.

- Building a Concrete and Iron Bar Table
- Upgrading a Table Top
- Casting a Concrete Patio Chair
- Adding Color to Concrete
- Making a Silicone Mold and Concrete Casting
- Building an Outdoor Concrete Bench
- Building a Concrete Fire Pit
- Forming a Concrete Planter

## HOW-TO PROJECT VIDEOS

- Over **50 How-To Project Videos**
- More than **1.2 Million Hours Viewed**
- Video Views Are An Important Indicator of Project Interest

## TOP QUIKRETE.COM PROJECT VIDEOS

1. How To Pour And Finish Concrete
2. How To Set Posts in Concrete without Mixing
3. How To Repair Concrete Cracks
4. How To Resurface Concrete
5. How To Build Deck Footings
6. How To Hand Mix Concrete
7. How To Build A Block Wall
8. How To Build A Walkway with the WALKMAKER®
9. How To Repair Cracks and Holes in Stucco
10. How To Make Thin Repairs To Damaged Concrete

## ALSO VIEWABLE ON MOBILE DEVICES

Customers can easily access video content using their mobile phone or tablet as well as by visiting the desktop site.






Social media provides a forum for open dialogue between **QUIKRETE®** and DIYers, who are also sharing their experiences and ideas with each other. **QUIKRETE®** is inspiring home improvement projects by customizing the content to fit the conversations taking place on each specific social media platform.


## TOP 10 YOUTUBE VIDEOS

1. How To Build a Block Wall
2. How To Pour and Finish Concrete
3. How To Repair Concrete Cracks
4. How To Install Stucco
5. How To Resurface Concrete
6. How To Build a Paver Patio
7. How To Set Posts in Concrete
8. How To Build Deck Footings
9. How to Install Veneer Stone
10. How To Build a Block Wall Without Mortar

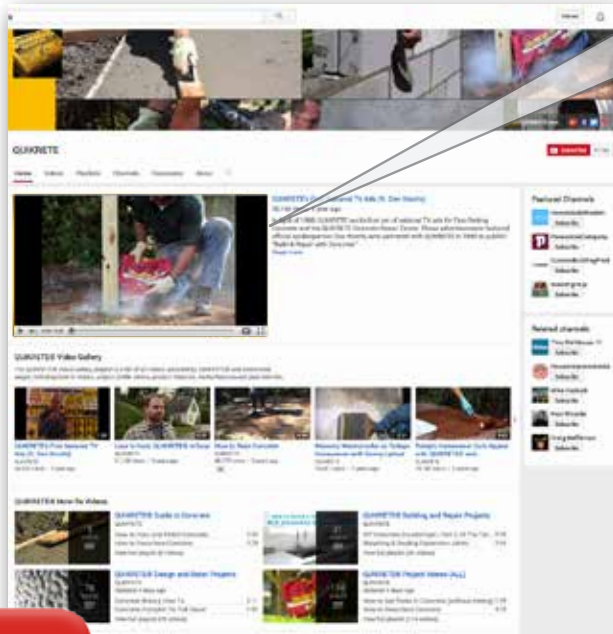


## YOUTUBE

- More Than **24 Million Views** of Instructional How-To Project Videos
- Over **1 Million Hours** of Product Application Training

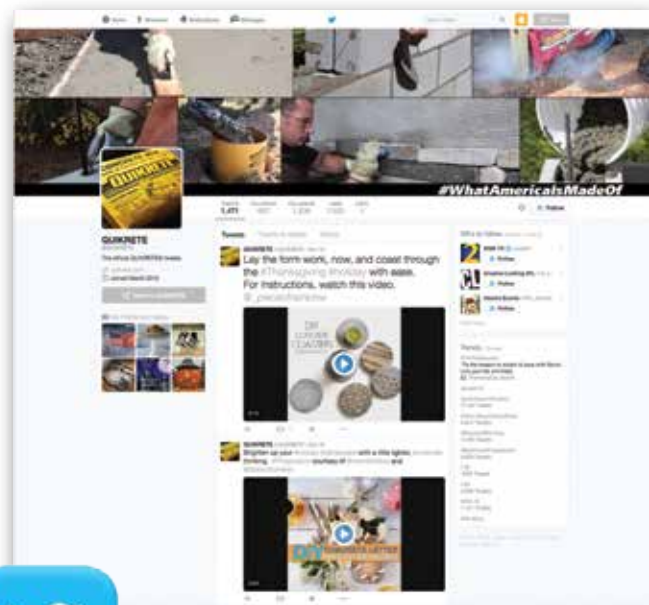


## TWITTER

- Posts Featuring **#QUIKRETE**, Link the Brand to Project Success

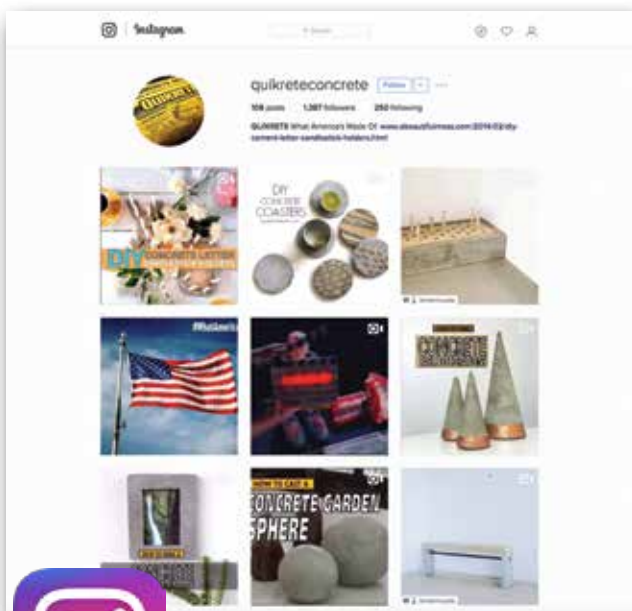

## INSTAGRAM

- Project Focused Content Creates a Forum for Fan Discussion and Community Engagement

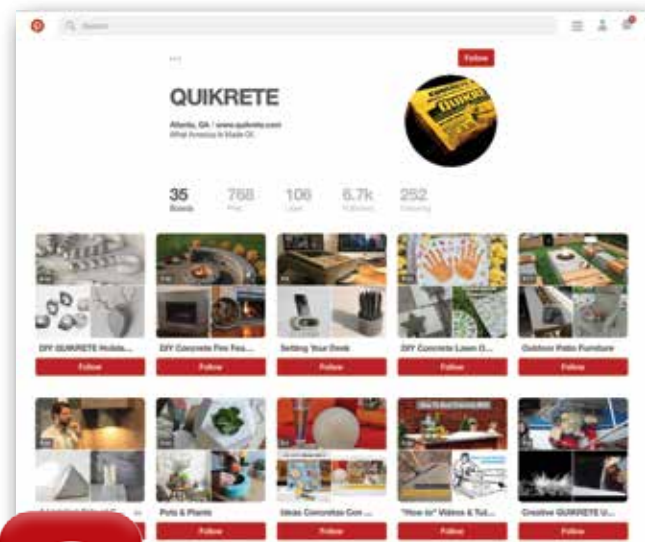


## PINTEREST

- Content Focused on Concrete Design and Décor Projects



## SOCIAL MEDIA

Consumers spend nearly 20% of their time online on social media, with the majority being allotted to Facebook. With this in mind, The **QUIKRETE®** Company instituted an integrated, promotional campaign called the **QUIKRETE®** One Bag Wonder Contest.

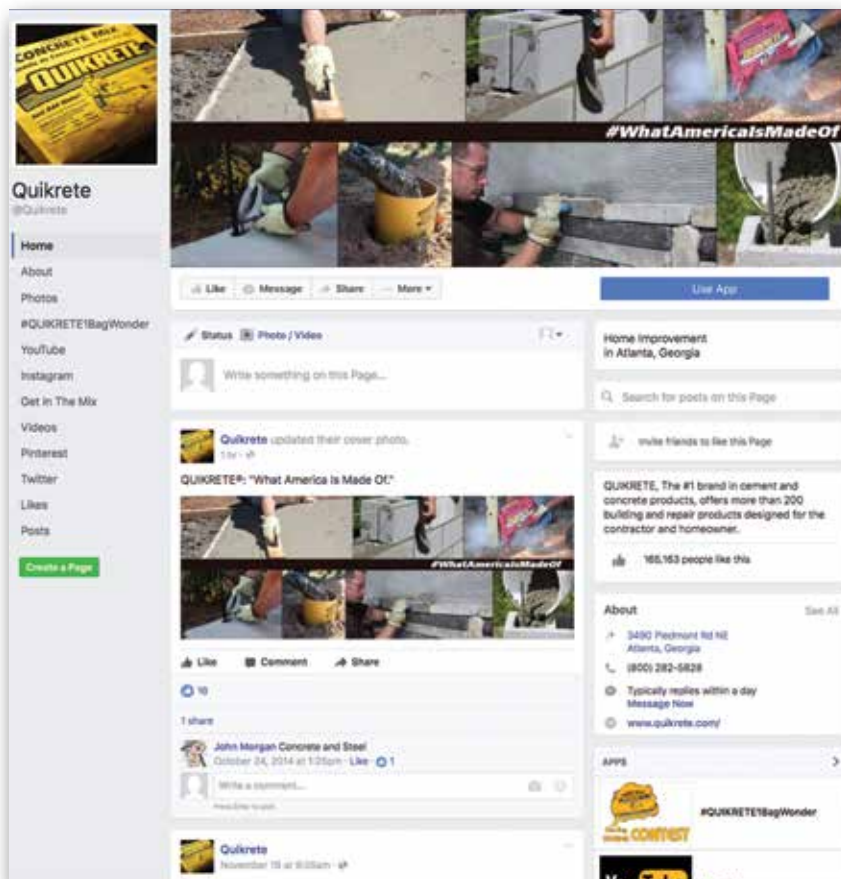

**QUIKRETE®** challenged fans and entrants to create a project, using just one bag of **QUIKRETE®**

**QUIKRETE®** created the Concrete Coffee Table Book to showcase over 90 project entries



### FACEBOOK

- Over **165,000 Fans** Sharing Projects Through Photos and Videos
- Views: **13.7 Million**
- Shares: **384,059**



## THE POWER OF ONE PROJECT

**QUIKRETE®** directly works with bloggers to develop and inspire project ideas, supporting these relationships with project advice, product expertise and other resources. Following one Mother-Daughter blogger duo's entry into **QUIKRETE®** One Bag Wonder Contest, the team wanted to try their hand at a homemade, how-to project video for their readership, "How to Cast a Concrete Pumpkin".

With **QUIKRETE®**'s support, the DIY bloggers posted the video to their Instagram account. After sharing it across the **QUIKRETE®** social network, the video quickly went Facebook viral:

- **Reaching More Than 30 Million People**
- **Gaining Over 13.7 Million Views on the QUIKRETE® Facebook Page**




On average, consumers spend more than 30 hours per month using mobile apps. Understanding this growing trend, **The QUIKRETE® Company** launched an intuitive mobile app that serves as a comprehensive resource for building, repair and home improvement projects. Built for use on iPhone, iPads and Android devices, the **QUIKRETE®** mobile app features useful interactive tools for successfully completing a project. Over **40,000 Downloads**.



## WHEN YOU KNOW MORE...YOU SELL MORE

### INTERACTIVE TOOLS

- QR Code & Bar Code Scanner for Product Information
- Product Search with Downloadable Technical Data
- Product Descriptions, Package Sizes and Uses
- Project Ideas for Indoor & Outdoor Projects
- How-To Project Videos with Step-By-Step Instructions (Tools & Materials List Included)
- Quantity Calculator to Determine Amount of Product Needed for Project
- QuikShare for Posting Project Videos
- Store Locator Based on Real-Time Geo-Targeting

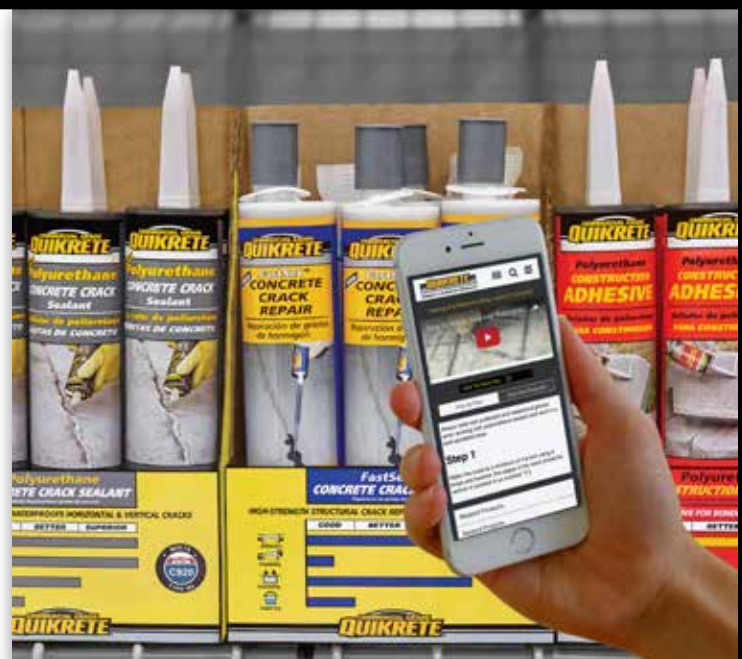



# SUPPORTING YOUR SALES TEAM

The **QUIKRETE®** Company takes a Total Program marketing approach to customer support. **QUIKRETE®** sales representatives work directly with each retailer to develop and implement a comprehensive and fully integrated marketing program. This "Total Program" is designed to engage and influence customers during all phases of the decision-making process, from inspiration to education to purchase. **QUIKRETE®** is committed to providing the right product mix and marketing support to drive concrete product sales.

**CEMENT & CONCRETE PRODUCTS™**

## BUILDING ON YOUR MORTAR SALE

Your customer's request for QUIKRETE® Mortar Mix is not the end of the sale..... it's just the beginning! QUIKRETE® can help you turn your mortar mix sale into a more profitable transaction that will also provide your customer with a better finished project.

(No. 1102)

**UPSELL TO THESE HIGHER MARGIN PRODUCTS**

**MAKE YOUR TOTAL SALE MORE PROFITABLE WITH THESE "ADD ON ITEMS"**

**CORE-FILL GROUTS**

A flowable grout used for filling masonry block cores.

- Pumped or poured applications
- Use Fine Core-Fill Grout when grout space is less than 4 inches in either direction
- Use Coarse Core-Fill Grout when grout space is greater than 4 inches in either direction

**MASON MIX**

High strength, contractor grade, pre-blended Mason Mix contains properly graded materials and requires only the addition of water.

**Use for structural & non-structural masonry applications above and below grade:**

- Walls
- Columns
- Brick/stone veneer
- Tuck pointing

**Also available in 3000 lb. bulk bags**

**VENEER STONE MORTARS**

A Portland cement and hydrated lime designed for veneer applications and manufactured and natural stone.

**Also available in Polymer-Modified formulas.**

- Apply directly to concrete and masonry surfaces
- Superior bond strength
- Consistent, pre-blended mix

**STUCCO & MORTAR COLORS**

Adds a decorative touch to stucco and mortar projects. Add to mixing water and then mix colored water with dry mix. Provides permanent integral color.

**Use with any of our mortar or stucco products including:**

- QUIKRETE® Finish Coat Stucco
- Heavy Duty Masonry Coating
- One Coat Fiberglass Reinforced Stucco
- Mason Mix
- QUIKWALL®

**20 colors available. Textured color chart available.**

**REBAR**

Structural steel for vertical support. Encase rebar in core-fill grout in every other masonry core for load-bearing applications.

**BACKER ROD**

Foam rope used to partially fill large gaps and joints before applying sealant. Use for vertical applications, such as masonry expansion joints. Available in 3/4" and 1" diameter, both in 20 foot lengths.

**GUIDE TO CONCRETE BOOK (No. 6924)**

The QUIKRETE® GUIDE TO CONCRETE book provides practical instructions and clear step-by-step photos to help accomplish the most popular projects and repairs with concrete, masonry and stucco products.

For more information on these QUIKRETE® products and for project instructions visit [QUIKRETE.com](http://QUIKRETE.com)

**CEMENT & CONCRETE PRODUCTS™**

## BUILDING ON YOUR CONCRETE SALE

Your customer's request for QUIKRETE® Concrete Mix is not the end of the sale..... it's just the beginning! QUIKRETE® can help you turn your concrete mix sale into a more profitable transaction that will also provide your customer with a better finished project.

(No. 1101)

**UPSELL TO THESE HIGHER MARGIN PRODUCTS**

**MAKE YOUR TOTAL SALE MORE PROFITABLE WITH THESE "ADD ON ITEMS"**

**FAST-SETTING CONCRETE MIX (No. 1004)**

Sets hard in approximately 20-40 minutes. Sets posts without mixing. Pour dry mix into hole and soak with water.

**Use For Setting:**

- Fence posts
- Mailbox posts
- Swing sets

**Use For Building:**

- Steps
- Sidewalks
- Air conditioner pads

**CRACK RESISTANT CONCRETE MIX (No. 1006)**

Formula significantly reduces cracking from drying shrinkage and is designed for use in structural concrete applications. **Other benefits & features include:**

- Superior workability
- Provides greater impact resistance
- Air entrained for improved freeze-thaw durability
- Eliminates the need for wire mesh in typical slab-on-grade slabs

**QUIKRETE® 5000 CONCRETE MIX (No. 1007)**

Designed for higher-early strength gain. Achieves 2500 PSI in 3 days and 5000 PSI in 28 days. Ideal for cold weather application. **Use For:**

- Concrete projects 2" thick or more that require high strength
- Driveway aprons
- Sign footings
- Deck supports
- Floors

**LIQUID CEMENT COLORS (No. 1317)**

Mix with water and then add to dry concrete mix. One bottle will mix with two 80 lb. or 60 lb. bags of Concrete Mix. Available in red, brown, buff, charcoal and terra cotta. Provides permanent integral color.

Charcoal Brown Buff Red Terra Cotta

**CONCRETE BONDING ADHESIVE**

Permanently bonds new concrete to existing concrete overlays 1" or thicker. Eliminates the need for roughing the surface before the application.

**ACRYLIC CONCRETE CURE & SEAL - SATIN FINISH (No. 8730)**

Water based clear acrylic coating cures freshly placed concrete and seals concrete and masonry surfaces.

- Eliminates the need for water curing freshly placed concrete.
- Protects and seals from acids, grease, oils, food stains, salt and more.

**POLYURETHANE SELF-LEVELING SEALANT (No. 8660)**

A high performance, construction grade, polyurethane sealant, used for sealing cracks and joints in horizontal concrete surfaces.

**Use For:**

- Sealing expansion joints in concrete slabs
- Sealing cracks in concrete floors, driveways, patios, steps, basements and pool decks

**GUIDE TO CONCRETE BOOK (No. 6924)**

The QUIKRETE® GUIDE TO CONCRETE book provides practical instructions and clear step-by-step photos to help accomplish the most popular projects and repairs made with concrete, masonry and stucco products.

For more information on these QUIKRETE® products and for project instructions visit [QUIKRETE.com](http://QUIKRETE.com)





## REPAIR PRODUCT BAYS

- Organized Display Categorizes Product
- Overhead Signage Gives Product Overviews
- Improves Shopping Experience
- Product Mix is Customized by Account



## TEAR PADS & BROCHURES

- Project Oriented
- Step-by-Step Instructions
- Tools and Materials Needed Sections
- Bilingual



## BANNERS & OVERHEAD SIGNS

- Provides Project Inspiration
- Directs Customer Traffic Flow
- Product Selection Guidance



## STORE DISPLAYS & MINI PALLETES

- Increase Impulse Purchases
- Feature New Products



## NEW DISPLAY CASES & BIN TAGS

- Product Descriptions
- Quantity Calculators
- Bilingual
- Application Photography
- Feature / Performance Icons



## FULL COLOR GRAPHIC PACKAGING

- Application Images Aid in Product Selection
- New Commercial Grade **QUIKRETE®** Packaging



## PROFESSIONAL SALES REPRESENTATIVES

The **QUIKRETE®** Company's fleet of over 600 sales, merchandising and customer service representatives provide support before, during and after the sale.

- Product Knowledge and Sales Associate Training
- Consumer Clinics
- Technical Support
- Order Facilitation
- Contractor Demos
- Merchandising Support



## PUBLIC RELATIONS

The positive third-party endorsement of media has always been a cornerstone of the **QUIKRETE®** marketing program and that remains true today, as evidenced by the more than **1 billion editorial impressions** generated through television, radio, trade and consumer magazines, and newspaper coverage annually. **QUIKRETE®** deploys a variety of tactics to secure media coverage annually including how-to project press releases, commercial project profiles, product announcements, company news, trade show briefings, media tours, by-lined articles, and seasonal pitches.



## QUIKNEWS & IN THE MIX



The **QUIKRETE®** Company engages homeowners and contractors directly through electronic newsletters promoting the latest products, projects and trends.

### QUIKNEWS

Inspires homeowners with project ideas and how-to videos.

### IN THE MIX

Designed to inform and educate contractors with commercial project profiles and best-practices.

Both newsletters are driven to reinforce **QUIKRETE®** as the concrete building and repair resource.





NEW!

## EPOXY CONCRETE REPAIR



A multi-purpose, high strength, rapid cure, two component epoxy bonding and repair adhesive. **QUIKRETE® Epoxy Concrete Repair** can be used for concrete and masonry repairs. Its non-sag and rapid setting properties make it suitable for vertical or horizontal repairs 1/2 in (13 mm) or larger. (Page 23)

## Use For Repairing:

- Concrete
- Brick
- Stone
- Wood
- Stucco
- Tile
- Concrete block
- Other Substances

NEW!

## FASTSET™ CONCRETE CRACK REPAIR



A rapid curing, two-part hybrid polyurethane crack repair in a single cartridge. The specially formulated self-leveling, low viscosity material penetrates deep into cracks for a superior bond that can be opened to traffic in one hour at 77 °F (25 °C). **QUIKRETE® FastSet™ Concrete Crack Repair** is suitable for repairing exterior & interior cracks from hairline up to 1 in (25 mm). (Page 21)

## Use For:

- Driveways
- Sidewalks
- Bridge Decks
- Garage Floors
- Basement Floors
- Warehouse Floors

NEW!

## FASTSET™ STUCCO PATCH



**QUIKRETE® FastSet™ Stucco Patch** is a fast setting, Portland based stucco patching material. **FastSet™ Stucco Patch** has a working time of 20 to 30 minutes and can be painted after 90 minutes. The material is formulated to provide water repellancy, minimal shrinkage and improved durability. (Page 32)

## Use For:

- Repairing Cracks & Holes in Stucco Walls
- Around Replacement Windows & Doors
- Interior & exterior Applications

*Meets requirements of ASTM C 926*

NEW!

## POLYMER MODIFIED STRUCTURAL REPAIR



Polymer modified and shrinkage-compensated, rapid setting, high strength repair material designed for vertical & horizontal structural concrete repairs. The material can be extended with up to 10 lb (4.5 kg) of gravel. **QUIKRETE® Polymer Modified Structural Repair** can be used for full-depth and partial-depth repairs and can be sculpted to match the contours of the existing concrete surfaces. 20 to 45 minute set time. Exceeds 2500 PSI (17.2 MPa) in 3 hours. (Page 20)

## Use For:

- Driveways
- Sidewalks
- Bridge Decks
- Ramps
- Floors
- Parking Garages

*Exceeds the requirements of ASTM C 928 R2*



# PROFESSIONAL & TECHNICAL SUPPORT

According to the Professional Tracking Study conducted by The Farnsworth Group, nearly all professionals (99%) recognize the **QUIKRETE®** brand and name, and 81% reported purchasing, recommending or specifying **QUIKRETE®** products.

The **QUIKRETE®** Company continues to educate and reinforce with professionals the breadth and performance of our Commercial Grade product line through targeted print advertising, direct mail, trade show demonstrations and one on one relationships.

**QUIKRETE®** Commercial Grade Products are specifically formulated to meet job-site applications requirements, such as working time, compressive strength and flexural strength, bond strength, workability and consistency.


## TECHNICAL DATA

The **QUIKRETE®** Company's Technical and Marketing Team provides technical data support to ensure that contractors and design professionals can specify and source exactly what they need for any size and type of construction, remodeling and municipal project.

### CONSTRUCTION PRODUCTS GUIDE



- Organized by CSI Division
- Includes Product Performance Data, Yields & Coverage, Mixing & Application Instructions
- Technical Specifications
- Updated 8th Edition

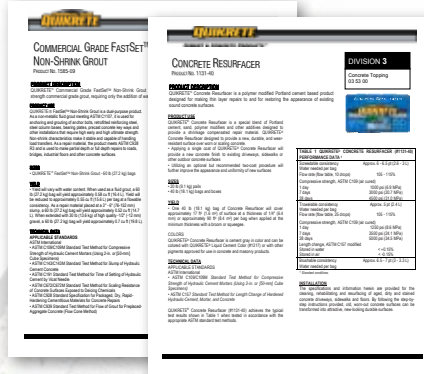


### TECHNICAL DATA SHEETS

- Product Performance
- Application & Mixing Instructions
- Yields & Coverage
- Technical Specifications

### PROJECT PROFILES

- Hundreds of Case Studies
- Product Applications
- Products & Quantities Used
- Project Photos
- Project Details

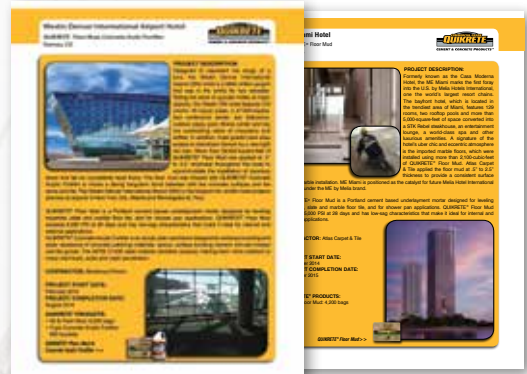


### TECHNICAL DATA THUMB DRIVE



- Guide Specifications
- Technical Data Sheets
- MSDS
- Project Profiles
- Application Videos

### PRODUCT LITERATURE

- Concrete Mix Selector Guide
- FastSet™ Product Selector Guide
- Mason Mix & Mortar Selector Guide
- Stucco Product Selector Guide

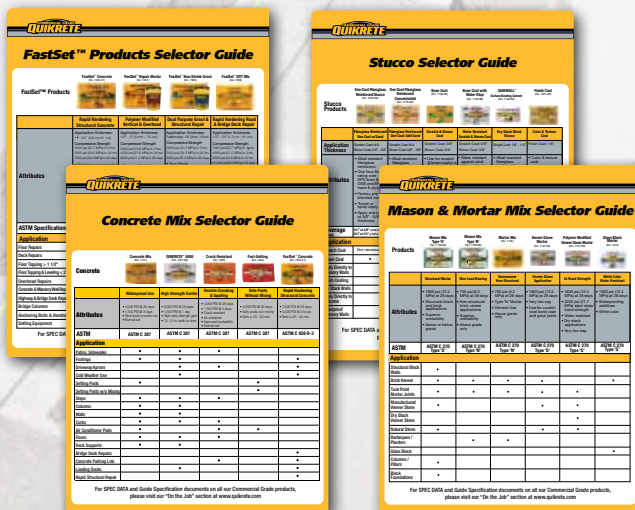



The **QUIKRETE®** Company continues to be an industry leader in new product research and innovation, committed to developing new products to meet the evolving needs of the homeowner and professional user.

The **QUIKRETE®** Technical Center also routinely evaluates production samples to assure that all products meet or exceed ASTM standards and provide consistent quality throughout our more than 100 production facilities serving the United States, Puerto Rico, Canada, Central and South America.

## WE'RE HERE TO HELP YOU 24/7

The **QUIKRETE®** Help Center is available to provide technical support to your contractors and consumers 24/7 at (800) 282-5828.



# TRADE SHOWS

The **QUIKRETE®** Company exhibits at and attends more than 100 national and regional trade shows annually. These shows provide **QUIKRETE®** the opportunity to promote and demonstrate new products and strengthen our position with contractors, architects, engineers and municipalities.

## WORLD OF CONCRETE

- Attendance: 50,000 Concrete and Masonry Professionals
- Conducted Product Demonstrations Viewed by More Than 2,000 Attendees

## INTERNATIONAL BUILDERS SHOW

- Attendance: 75,000 Home Builders, Construction Professionals, Architects and Designers
- Conducted Product Demonstrations Viewed by Approximately 2,000 Attendees





## CONCRETE MIX

Original 4000 PSI average compressive strength blend of Portland cement, sand, gravel or stone, and other approved ingredients. Just add water.

### Use For:

- Floors
- Footings
- Steps
- Sidewalks
- Patios
- Curbs
- Setting Posts

Exceeds the requirements of ASTM C 387

Item No.	Package Size	Metric	Quantity	UPC
1101-10	10 lb bag	4.5 kg	6/bale	0-39645-11011-9
1101-40	40 lb bag	18.1 kg	80/pallet	0-39645-11014-0
1101-60	60 lb bag	27.2 kg	56/pallet	0-39645-11016-4
1101-80	80 lb bag	36.2 kg	42/pallet	0-39645-11018-8

\* 90 lb. bags available regionally.



## FAST-SETTING CONCRETE MIX

A special blend of fast-setting cements, sand and gravel designed to set hard in approximately 20 to 40 minutes. Use for building and setting posts. Sets posts without mixing. Pour dry mix into hole and soak with water.

### Use For Setting:

- Fence posts
- Mailbox posts
- Swing sets

### Use For Building:

- Steps
- Sidewalks
- Air conditioner pads

Exceeds the requirements of ASTM C 387

Item No.	Package Size	Metric	Quantity	UPC
1004-50	50 lb bag	22.7 kg	64/pallet	0-39645-10045-5



## QUIKRETE® 5000 CONCRETE MIX

Commercial Grade concrete mix designed for higher-early strength gain. Achieves 2500 PSI in 3 days and 5000 PSI in 28 days. Ideal for cold weather application.

### Use For:

- Concrete projects 2 in thick or more that require high strength
- Driveway aprons
- Patios
- Curbs
- Sign footings
- Deck supports
- Floors

Exceeds the requirements of ASTM C 387

Item No.	Package Size	Metric	Quantity	UPC
1007-01	60 lb bag	27.2 kg	56/pallet	0-39645-10076-9
1007-00	80 lb bag	36.2 kg	42/pallet	0-39645-10078-3



## Q•MAX™ PRO CONCRETE MIX

Fiber reinforced, rapid hardening concrete formulated to provide a 1-hour working time, a walk-on time of 3 hours, and achieve a compressive strength of 6500 PSI. The mix provides superior workability and finishing characteristics and resists drying shrinkage cracks. Air entrained for improved freeze-thaw durability and contains a corrosion inhibitor to protect reinforced steel.

### Use For:

- Floors
- Footings
- Sidewalks
- Steps
- Walls
- Patios
- Slabs
- Columns
- Ramps
- Patios

Item No.	Package Size	Metric	Quantity	UPC
1004-81	80 lb bag	36.2 kg	42/pallet	0-39645-10039-4



## CRACK RESISTANT CONCRETE MIX

Commercial Grade concrete mix with air entraining admixture, and alkali-resistant reinforcing fibers. Formula significantly reduces cracking from drying shrinkage and is designed for use in structural concrete applications. Achieves 4000 PSI in 28 days.

### Other Benefits & Features Include:

- Superior workability
- Provides greater impact resistance
- Air entrained for improved freeze-thaw durability
- Eliminates the need for wire mesh in typical slab-on-grade slabs

Exceeds the requirements of ASTM C 387

Item No.	Package Size	Metric	Quantity	UPC
1006-67	60 lb bag	27.2 kg	56/pallet	0-39645-10061-5
1006-80	80 lb bag	36.2 kg	42/pallet	0-39645-10068-4



## COUNTERTOP MIX

A specially formulated flowable high strength concrete mix for use in pre-cast and cast-in-place concrete countertop applications. Available in Gray & Tint-Base White.

### Other Benefits and Features Include:

- High flow formula minimizes the need for mechanical vibration
- Reduced shrinkage formulation
- Strip forms in 18 hours
- Exceeds 2500 PSI (17.7 MPa) at 3 days
- 3500 PSI (24.1 MPa) at 7 days
- 5000 PSI (34.5 MPa) at 28 days

Item No.	Package Size	Metric	Quantity	UPC
Gray	80 lb bag	36.2 kg	42/pallet	039645-11067-6
1106-80				
Tint Base White	80 lb bag	36.2 kg	42/pallet	039645-11069-0
1106-81				

## QUIKRETE® Timeline: 1940-2016

**May 22, 1940** Maintenance Products Inc - **QUIKRETE®** Founded

**April 1951** Produces first **QUIKRETE®** branded product: Gemaco **QUIKRETE®**

**August 1954** **QUIKRETE®** receives US trademark registration



**QUIKRETE**





## MORTAR MIX

A blend of masonry cement and graded sand. Just add water.  
**Use for non structural construction & repair of brick, block and stone:**

- Barbecues
- Pillars
- Planters
- Non-structural walls
- Tuck pointing mortar
- Veneers

Meets the requirements of ASTM C 270 & C 1714 for Type N Mortar

Item No.	Package Size	Metric	Quantity	UPC
1102-10	10 lb bag	4.5 kg	6/bale	0-39645-11021-8
1102-40	40 lb bag	18.1 kg	80/pallet	0-39645-11024-9
1102-60	60 lb bag	27.2 kg	56/pallet	0-39645-11026-3
1102-80	80 lb bag	36.2 kg	42/pallet	0-39645-11028-7



## MASON MIX

High-strength, contractor grade, pre-blended mortar mix. Mason Mix contains properly graded masonry sand and requires only the addition of water.

**Use For Structural & Non-Structural Masonry Applications Above and Below Grade:**

- Walls
- Brick/stone veneers
- Columns
- Tuck pointing

Meets the requirements of ASTM C 270 & C 1714

\* Also available in 3000 lb. bulk bags

Item No.	Package Size	Metric	Quantity	UPC
<b>Type S</b>				
1136-00	60 lb bag	27.2 kg	56/pallet	0-39645-11366-0
1136-80	80 lb bag	36.2 kg	42/pallet	0-39645-11368-4
<b>Type N</b>				
1136-86	80 lb bag	36.2 kg	42/pallet	0-39645-11356-1
<b>Type M</b>				
1136-85	80 lb bag	36.2 kg	42/pallet	0-39645-11358-5



## MASON MIX - COLORED FORMULA

High-strength, contractor grade, pre-blended mortar mix. Colored Mason Mix contains properly graded masonry sand and color pigment.

**Use For Structural Masonry Applications Above and Below Grade:**

- Walls
- Brick/stone veneers
- Columns
- Tuck pointing
- Also available in Type "N" and "M" formulations

Meets the requirements of ASTM C 270 & C 1714

\* Contact your local representative for exact color availability.

\* Also available in 3000 lb. bulk bags

Item No.	Package Size	Metric	Quantity	UPC
<b>Type S</b>				
1136-71	80 lb bag	36.2 kg	42/pallet	0-39645-11367-7
<b>Type N</b>				
1136-72	80 lb bag	36.2 kg	42/pallet	0-39645-11365-3



## GLASS BLOCK MORTAR

Specifically formulated blend of white sand, white cement, hydrated lime and waterproofing additives. Just add water.

**Use For:**

- Laying glass block for interior and exterior walls
- Laying brick, block or tile where white mortar is desired

Meets the requirements of ASTM C 270 & C 1714 for Type S Mortar

Item No.	Package Size	Metric	Quantity	UPC
1610-00	50 lb bag	22.7 kg	63/pallet	0-39645-16105-0



## VENEER STONE MORTARS

A Portland cement and hydrated lime based mortar designed for veneer applications and tuck pointing of manufactured and natural stone.

**Also available in Polymer-Modified and Natural Stone formulas.**

- Apply directly to concrete and masonry surfaces or over expanded metal lath
- Superior bond strength
- Consistent, pre-blended mix

Meets the requirements of ASTM C 270 & C 1714

\* Also available in 3000 lb. bulk bags

Item No.	Package Size	Metric	Quantity	UPC
1137-80	80 lb bag	36.2 kg	42/pallet	0-39645-11378-3
<b>Poly-Mod</b>				
1137-85	80 lb bag	36.2 kg	42/pallet	0-39645-11377-6
<b>Natural Stone</b>				
1137-88	80 lb bag	36.2 kg	42/pallet	0-39645-11379-0

**January 1959** Introduces  
**QUIKRETE®**  
Vinyl Concrete Patcher



**January 1967** Introduces  
Hydra-Hold (Hydraulic Water Stop)



**April 1968** Publishes Do-It-Yourself  
With Packaged Concrete  
And Mortar Guide



**1972**



10<sup>th</sup> Plant



## ROOF TILE MORTAR FL-15

Contractor grade, high bond strength mortar.

### Use For:

- Setting flat and low profile clay, cement and other roof tile
- Roofs up to 15 feet high

*Meets the requirements of ASTM C 270 for Type M Mortar*

Item No.	Package Size	Metric	Quantity	UPC
1140-80	80 lb bag	36.6 kg	42/pallet	0-39645-11408-7



## CORE-FILL GROUTS

A properly proportioned mixture of Portland cement, graded aggregate, and other ingredients designed to provide a flowable grout, requiring only the addition of water. Available in Fine and Coarse.

### Use For:

- Filling masonry block cores
- Pumped or poured applications
- Use Fine Core-Fill Grout when grout space is less than 4 inches in either direction
- Use Coarse Core-Fill Grout when grout space is greater than 4 inches in either direction

*Meets the strength requirements of ASTM C 476*

Item No.	Package Size	Metric	Quantity	UPC
<b>Coarse</b> 1585-07	80 lb bag	36.2 kg	42/pallet	0-39645-15853-1
<b>Fine</b> 1585-08	80 lb bag	36.2 kg	42/pallet	0-39645-15854-8



## SELF-CONSOLIDATING CORE-FILL GROUT

A Portland cement based highly fluid grout specifically designed to fill masonry block cores without segregation.

### Other benefits & features include:

- Eliminates the need for vibrating.
- Can be placed in single lifts up to 12 ft 8 in high
- Contains 3/8 in (9.5 mm) aggregate.
- For use when grout space is greater than 4 in (100 mm) in both directions.

*Meets the requirements of ASTM C 476 at 24-28 in. (600-700 mm) slump flow*

Item No.	Package Size	Metric	Quantity	UPC
1585-06	80 lb bag	36.2 kg	42/pallet	0-39645-15857-9

**September 1974**

First national **QUIKRETE®** ad:  
The Turnover Twins



**1977**



20<sup>th</sup> Plant

**January 1977**

Introduces **QUIKWALL®**  
Surface Bonding Cement







## PORTLAND CEMENT

Mixed with aggregate and other ingredients to make concrete mix, mortar mix and base coat stucco. Available in Type I, Type I/II, Type II and Type III.

To make Concrete Mix:

- 1 Part Portland Cement (by volume)
- 2 Parts All-Purpose Sand
- 3 Parts Gravel

To make Type S Mortar Mix:

- 1 Part Portland Cement (by volume)
- ½ Part Hydrated Lime
- 3½ to 4½ Parts Masonry Sand

Meets the requirements of ASTM C 150 and Federal Specifications for Portland cement.

Item No.	Package Size	Metric	Quantity	UPC
1124-31	31 lb bag	14.1 kg	100/pallet	0-39645-11231-1
1124-47	47 lb bag	21.3 kg	63/pallet	0-39645-11244-1
1124-94	94 lb bag	42.6 kg	35/pallet	0-39645-11249-6
1124-42	92.6 lb bag	42 kg	35/pallet	0-39645-11421-6



## MASONRY CEMENT

Available in Type N and Type S masonry cement.

To make Type N Mortar Mix:

- 1 Part Type N Masonry Cement (by volume)
- 3 Parts Masonry Sand

To make Type S Mortar Mix:

- 1 Part Type S Masonry Cement (by volume)
- 3 Parts Masonry Sand

Meets the requirements of ASTM C 91 and Federal Specifications for masonry cement.

Item No.	Package Size	Metric	Quantity	UPC
<b>Type S</b>				
1125-71	70 lb bag	31.7 kg	40/pallet	0-39645-11251-9
<b>Type N</b>				
1125-70	70 lb bag	31.7 kg	40/pallet	0-39645-11257-1



## PORTLAND-LIME CEMENT

Blend of Portland cement and hydrated lime meeting the Type S proportions.

Available Regionally.

To make Type S Mortar Mix:

- 1 Part Portland-Lime Cement (by volume)
- 2½ to 3 Parts Masonry Sand

Meets the requirements of ASTM C 91 and Federal Specifications for masonry cement.

Item No.	Package Size	Metric	Quantity	UPC
1125-21	70 lb bag	31.7 kg	40/pallet	0-39645-12521-2



## PREMIUM PLASTERING CEMENT

Properly proportioned blend of Portland cement with air entraining and plasticized admixtures for use in base coat and finish coat mixes. Formulation provides improved workability, reduced shrinkage and low-sag characteristics. Available Regionally.

Meets the requirements of ASTM C 91 and Federal Specifications for masonry cement.

Item No.	Package Size	Metric	Quantity	UPC
1125-98	94 lb bag	42.6 kg	35/pallet	0-39645-11259-5



## STUCCO CEMENT

Blended cement designed for use with plaster sand to make base coat stucco and finish coat stucco mixes.

Available Regionally.

To make Base Coat Stucco Mix:

- 1 Part Stucco Cement (by volume)
- 3 to 4 Parts Plaster Sand (ASTM C 897)

Meets the requirements of ASTM C 91

Item No.	Package Size	Metric	Quantity	UPC
1201-85	80 lb bag	36.2 kg	42/pallet	0-39645-12016-3



## PLASTIC CEMENT

Blended cement specifically designed for use with plaster sand to make Base Coat Stucco.

Available Regionally.

To make Scratch and Base Coat Stucco Mix:

- 1 Part Plastic Cement (by volume)
- 3 to 4 Parts Plaster Sand

Meets the requirements of ASTM C 1328 Type M and S.

Item No.	Package Size	Metric	Quantity	UPC
2121-94	94 lb bag	42.6 kg	35/pallet	0-39645-21219-6

**May 1980** Introduces color-coded pails for **QUIKRETE®** Repair Products



**1981**



30<sup>th</sup> Plant

**June 1982** First **QUIKRETE®** Profit Manual



# CONCRETE REPAIR & WATERPROOFING



## CONCRETE RESURFACER

A special blend of Portland cement, sand, polymer modifiers and other additives. Designed to provide a shrinkage compensated repair material for making thin repairs to sound concrete in need of surface renewal. Can be squeegee, trowel or brush applied.

### Use For:

- Sidewalks
- Curbs
- Driveways
- Concrete floors
- Pool decks
- Patios
- Floors
- Parking decks

Item No.	Package Size	Metric	Quantity	UPC
1131-20	20 lb pail	9.1 kg	60/pallet	0-39645-11315-8
1131-40	40 lb bag	18.1 kg	64/pallet	0-39645-11310-3
1131-40	40 lb bag	18.1 kg	35/mini pallet	0-39645-11310-3
1131-80	80 lb bag	36.2 kg	42/pallet	NA



## SAND/TOPPING MIX

Consists of a uniformly blended mixture of Portland cement, graded sand and other approved ingredients.

### Use For:

- Repairing and topping damaged concrete surfaces less than 2 inches thick
- As a base for laying flagstone and paving bricks

Item No.	Package Size	Metric	Quantity	UPC
1103-10	10 lb bag	4.5 kg	6/bale	0-39645-11031-7
1103-40	40 lb bag	18.1 kg	80/pallet	0-39645-11034-8
1103-60	60 lb bag	27.2 kg	56/pallet	0-39645-11036-2
1103-80	80 lb bag	36.2 kg	42/pallet	0-39645-11038-6



## VINYL CONCRETE PATCHER

Multi-purpose concrete repair material with strong adhesive properties. Trowels to a feather edge of 1/16 in. Made of a special blend of exterior grade vinyl resin, fine sand, and Portland cement. Just add water. Available in gray and white.

### Use For:

- Making smooth repairs to cracked or chipped concrete floors, sidewalks or steps

Item No.	Package Size	Metric	Quantity	UPC
1133-11	10 lb pail	4.5 kg	4/case	0-39645-11343-1
1133-20	20 lb pail	9.1 kg	60/pallet	0-39645-11332-5
1133-40	40 lb bag	18.1 kg	64/pallet	0-39645-11334-9
1133-40	40 lb bag	18.1 kg	35/mini pallet	0-39645-11334-9



## QUICK-SETTING CEMENT

Specially formulated to set in approximately 10 to 15 minutes. Can be molded or sculpted into place.

### Use For:

- Making concrete repairs where rapid setting is required
- Ideal for repairing broken edges of concrete steps and curbs

Tested in Accordance with ASTM C 191

Item No.	Package Size	Metric	Quantity	UPC
1240-11	10 lb pail	4.5 kg	4/case	0-39645-12413-0
1240-20	20 lb pail	9.1 kg	60/pallet	0-39645-12404-8
1240-50	50 lb. bag	22.7 kg	64/pallet	0-39645-12405-5



## ANCHORING CEMENT - EXTERIOR USE

A pourable rapid setting expansive cement that develops strength greater than concrete. Sets in 10 to 30 minutes. Expands as it hardens to fill voids and lock itself securely into place. Suitable for wet environments.

### Use For:

- Setting bolts, handrails, or anything metal to be anchored in concrete
- Ideal for repairing loose wrought iron railings
- Can be used for interior or exterior applications

Tested in Accordance with ASTM E 488

Item No.	Package Size	Metric	Quantity	UPC
1245-11	10 lb pail	4.5 kg	4/case	0-39645-12462-8
1245-20	20 lb pail	9.1 kg	60/pallet	0-39645-12452-9
1245-50	50 lb pail	22.7 kg	64/pallet	0-39645-12456-7



## HYDRAULIC WATER-STOP CEMENT

Rapid setting, high strength repair material designed to plug leaks instantly in concrete and masonry. Sets in 3 to 5 minutes and can be used above and below grade.

### Use For:

- Blocking running water or leaks in cracked masonry or concrete surfaces
- Can be used on swimming pools, foundations and for sealing around concrete pipe

Tested in Accordance with ASTM C 191

Item No.	Package Size	Metric	Quantity	UPC
1126-11	10 lb pail	4.5 kg	4/case	0-39645-11273-1
1126-20	20 lb pail	9.1 kg	60/pallet	0-39645-11262-5
1126-50	50 lb pail	18.1 kg	64/pallet	0-39645-11266-3
<b>White</b>				
1126-15	10 lb pail	4.5 kg	4/case	0-39645-11279-3

1984



40<sup>th</sup> Plant

August 1985

Secures Don Knotts as spokesperson.  
Publishes *Build & Repair With Concrete*



March 1988 Introduces  
Fast-Setting Concrete Mix





NEW!



## POLYMER MODIFIED STRUCTURAL REPAIR

Polymer modified structural repair is a polymer modified and shrinkage-compensated rapid setting, high strength repair material designed for vertical and horizontal structural concrete repairs. 20 to 45 minute set time. Exceeds 2500 PSI (17.2 MPa) in 3 hours.

### Use For:

- Partial-depth repairs and can be sculpted to match the contour of existing concrete surfaces.
- Full-depth repairs and can be extended with up to 10 lb (4.5 kg) of clean 1/2 in (13 mm) gravel.

*Exceeds the requirements of ASTM C 928 R2*

Item No.	Package Size	Metric	Quantity	UPC
1241-25	20 lb pail	1.36 kg	12/case	0-39645-12438-3



## ZIP & MIX - REPAIR MORTAR

Polymer modified fast-setting repair mortar in a new zip closure pouch. Add water directly to the pouch, zip the pouch closed and knead the bag for 3 minutes, then apply right out of the pouch.

### Use For:

- Vertical or horizontal repairs to concrete and masonry surfaces from 1/8 in to 2 in thick.

Item No.	Package Size	Metric	Quantity	UPC
1241-15	3 lb bag	1.36 kg	12/case	0-39645-12428-4



## CONCRETE PATCHING COMPOUND

Pre-mixed, ready to apply, acrylic patching compound for non-structural repairs to concrete and masonry surfaces. Use for patches up to 1/4 in thick. No mixing required.

### Use for:

- Sidewalks
- Steps
- Walkways
- Patios

Item No.	Package Size	Metric	Quantity	UPC
8650-35	1 qt pail	.95 L	12/case	0-39645-86502-6



## HEAVY DUTY MASONRY COATING

A powdered mixture of Portland cement, waterproofing agents and sand used to seal and beautify concrete, block, brick, stucco, and stone walls. Can be used in both interior and exterior applications both above grade and below. Available in white and gray.

### Use For:

- Basement walls
- Ponds
- Retaining walls
- Swimming pools

Item No.	Package Size	Metric	Quantity	UPC
<b>White</b>				
2401-20	20 lb pail	9.1 kg	60/pallet	0-39645-24012-0
1301-40	40 lb bag	18.1 kg	63/pallet	0-39645-13004-9
<b>Gray</b>				
2402-20	20 lb pail	9.1 kg	60/pallet	0-39645-24022-9
1312-40	40 lb bag	18.1 kg	63/pallet	0-39645-13124-4



## MULTI-PURPOSE CONCRETE RESURFACER


Polymer modified Portland cement based trowel applied repair material designed to provide a new, durable and wear resistant surface over worn or scaling concrete. Ideal for resurfacing large areas.

### Use for:

- Sidewalks
- Patios
- Loading docks
- Steps
- Driveways
- Traffic barriers
- Ramps
- Floors

Item No.	Package Size	Metric	Quantity	UPC
1131-45	40 lb bag	18.1 kg	64/pallet	0-39645-11313-4

**April 1988** Runs first national TV ads with Don Knotts featuring Fast-Setting Concrete and The **QUIKRETE®** Concrete Repair Center



**January 1991** Introduces Gray Concrete Crack Seal & Fiber-Reinforced Concrete



**January 1992** Introduces **QUIKRETE® 5000**, Mason Mix & WALKMAKER





## CONCRETE CRACK SEAL

A uniformly blended latex emulsion, specially designed to adhere to all concrete surfaces. No mixing is required. Just pour from the bottle. Blends in with the natural color of concrete.

### Use For:

- Repairing cracks in concrete sidewalks, patios and driveways



## ACRYLIC CONCRETE REPAIR

A weather-resistant, sanded acrylic and flexible crack-filler and sealer. Helps prevent water and ice damage to concrete & masonry surfaces. Dries to a textured finish to blend with surrounding surface. Apply with standard caulking gun for 10 oz size.

### Use For:

- Repairing cracks in concrete, masonry and stucco
- Ideal for vertical surfaces

Item No.	Package Size	Metric	Quantity	UPC
8640-15	5.5 oz tube	163 mL	12/case	0-39645-86409-8
8640-00	1 qt bottle	946 mL	12/case	0-39645-86400-5
8640-01	1 gal bottle	3.8 L	4/case	0-39645-86401-2

Item No.	Package Size	Metric	Quantity	UPC
8620-13	5.5 fl oz tube	163 mL	12/case	0-39645-86201-8
8620-10	10 fl oz tube	296 mL	12/case	0-39645-86200-1



## FASTSET™ CONCRETE CRACK REPAIR

A rapid curing, two-part hybrid polyurethane crack repair in a single cartridge. The specially formulated self-leveling low viscosity material penetrates deep into cracks for a superior bond that can be opened to traffic in one hour at 77 °F (25 °C). Suitable for repairs from hairline up to 1 in (25 mm).

### Use For:

- Driveways
- Sidewalks
- Bridge Decks
- Garage Floors
- Basement Floors
- Warehouse floors

Item No.	Package Size	Metric	Quantity	UPC
8650-69	8.6 fl oz tube	296 mL	12/case	0-39645-86507-1



## ACRYLIC MORTAR REPAIR

A sanded acrylic formula that adheres to brick, block, stone and concrete surfaces. Texture and color blends with the surrounding mortar. On the 10 oz caulk tube the square applicator tip is designed to smooth mortar joints.

### Use For:

- Tuck-pointing and sealing mortar joints

Item No.	Package Size	Metric	Quantity	UPC
8620-05	5.5 fl oz tube	163 mL	12/case	0-39645-86202-5
8620-09	10 fl oz tube	296 mL	12/case	0-39645-86002-1



## ACRYLIC STUCCO REPAIR

Fills and seals cracks in stucco up to 1/2 in (12 mm) wide. Weather resistant formula provides excellent adhesion and flexibility. Sanded acrylic formula blends with the texture of the surrounding stucco surface.

### Use For:

- Vertical or horizontal stucco repair applications

Item No.	Package Size	Metric	Quantity	UPC
8650-05	5.5 fl oz tube	163 mL	12/case	0-39645-86500-2
8650-10	10 fl oz tube	296 mL	12/case	0-39645-86501-9



## FIREPLACE REPAIR MORTAR

A silicate based refractory cement caulk for tuck-pointing damaged fireplace mortar joints and repairing cracked or chipped firebricks in fireplaces and wood-burning stoves. It provides superior adhesion and withstands temperatures of 2000 °F (1093 °C).

### Use For:

- Tuck-pointing damaged fireplace mortar joints and repairing cracked or chipped firebricks

*Meets the requirements of ASTM E 136*

Item No.	Package Size	Metric	Quantity	UPC
8620-21	10 fl oz tube	296 mL	12/case	0-39645-86206-3

1992



50<sup>th</sup> Plant

January 1993 Introduces  
**QUIKRETE®** 1-800 consumer hotline

October 1994 Introduces  
Concrete Project Instruction Center







## POLYURETHANE SELF-LEVELING SEALANT

High performance, commercial grade, polyurethane sealant, used for sealing cracks and joints in horizontal concrete surfaces. Self leveling formula provides superior adhesion, flexibility and durability. Meets ASTM C 920 Type S, Grade P, Class 25. Available in gray or sandstone.

### Use For:

- Sealing expansion joints in concrete slabs
- Sealing cracks in concrete floors, driveways, patios, steps, basements and pool decks

Item No.	Package Size	Metric	Quantity	UPC
<b>Gray</b>				
8660-10	10.1 oz tube	300 mL	12/case	0-39645-86601-3
8660-30	29 oz tube	858 mL	6/case	0-39645-86603-0
<b>Sandstone</b>				
8660-31	29 oz tube	858 mL	6/case	0-39645-86604-7



## POLYURETHANE NON-SAG SEALANT

High performance, commercial grade polyurethane sealant designed for vertical and overhead surfaces. The non-sag formula provides superior adhesion and flexibility. Meets ASTM C 920, Type S, Grade NS.

### Use For:

- Expansion joints in concrete wall panels and stucco walls
- Sealing around window and door openings
- Sealing cracks in concrete, stucco and masonry surfaces

Item No.	Package Size	Metric	Quantity	UPC
8660-11	10.1 oz tube	300 mL	12/case	0-39645-86602-3



## POLYURETHANE CONSTRUCTION ADHESIVE

High performance, commercial grade adhesive designed for permanently bonding concrete, brick, marble, stone, wood, glass, aluminum, steel, PVC and tile.

### Use For:

- Repairing broken concrete
- Bonding retaining wall block and caps

Item No.	Package Size	Metric	Quantity	UPC
9902-10	10.1 oz tube	300 mL	12/case	0-39645-99034-6
9902-11	29 oz tube	858 mL	6/case	0-39645-99041-4



## POLYURETHANE CONCRETE CRACK SEALANT

Commercial grade polyurethane sealant for permanently sealing and waterproofing cracks in concrete, masonry and stucco surfaces. The textured, non-sag formula blends with the surrounding surface. Dries to a firm, flexible consistency. Use on vertical and horizontal applications

Item No.	Package Size	Metric	Quantity	UPC
8620-17	10.1 oz tube	300 mL	12/case	0-39645-86212-4



## POLYURETHANE MORTAR JOINT SEALANT

Commercial grade polyurethane sealant for sealing, waterproofing and tuck-pointing damaged and deteriorating mortar joints. The textured, matte-finish non-sag formula blends with surrounding mortar joints. Dries to a firm, flexible consistency.

Item No.	Package Size	Metric	Quantity	UPC
8620-18	10.1 oz tube	300 mL	12/case	0-39645-86213-1



## BACKER ROD

Foam rope used to partially fill large cracks, gaps and joints before applying sealant. Use for horizontal and vertical applications. Available in 3/4 in diameter in 20 foot lengths.

Item No.	Package Size	Metric	Quantity	UPC
6917-42	3/4 in diameter 20 ft long	19.1 mm x 6 M	12/case	0-39645-69175-5

**January 1994** Introduces  
Liquid Cement Colors



**1995**



60<sup>th</sup> Plant

**January 1995** Introduces  
Acrylic Concrete Cure & Seal



**January 1996**  
Introduces  
bilingual packaging

# EPOXY ANCHORING & EPOXY CONCRETE REPAIR



## FASTSET™ ANCHORING EPOXY

Fast setting, two part component structural epoxy with a working time of 4 to 5 minutes. Non-sag, solvent-free, low odor formula.

### Use For:

- Anchoring bolts, threaded rods, tie bars and rebar dowels into concrete and masonry substrates.
- Horizontal and vertical applications.

Item No.	Package Size	Metric	Quantity	UPC
8620-30	8.6 fl oz tube	255 mL	12/case	0-39645-86210-0



## HIGH-STRENGTH ANCHORING EPOXY

High strength, two component structural epoxy with an extended working time of 15 minutes. Formulated to allow for adequate placement time. Non-sag, solvent-free, low odor formula.

### Use For:

- Heavy duty applications.
- Anchoring bolts, threaded rods, tie bars and rebar dowels into concrete and masonry substrates.
- Horizontal applications.

Item No.	Package Size	Metric	Quantity	UPC
8620-31	8.6 fl oz tube	255 mL	12/case	0-39645-86211-7

NEW!



## EPOXY CONCRETE REPAIR

A multi-purpose, rapid cure, two component epoxy bonding and repair adhesive suitable for cracks, holes, breaks and spalls. It's non-sag property makes it suitable for vertical and horizontal repairs.

### Use For Concrete & Masonry:

- Concrete
- Stucco
- Brick
- Tile
- Stone
- Concrete block
- Other substances

Item No.	Package Size	Metric	Quantity	UPC
8620-49	8.6 fl oz tube	255 mL	12/case	0-39645-86223-0

**January 1997** Launches first website



**January 1998** Introduces Commercial Grade™ Products



**1998**



70<sup>th</sup> Plant





## CLEANER, ETCHER & DEGREASER

Surface preparation treatment for use prior to repairing, sealing or staining concrete, paver and masonry surfaces

- Degreases, cleans oil and etches the surface
- Significantly improves adhesion of coatings and repair materials
- Concentrated formula
- Solvent-free, Low odor and Low VOC

Item No.	Package Size	Metric	Quantity	UPC
8675-34	1 gal	3.8 L	4/case	0-39645-86754-9



## OIL STAIN REMOVER

Removes oil stains and grease from concrete, paver and masonry surfaces.

- Heavy duty cleaner
- Solvent-free formula
- Ideal for use on concrete, garage floors, driveways and patios
- Low odor and Low VOC

Item No.	Package Size	Metric	Quantity	UPC
8670-06	1 gal	3.8 L	4/case	0-39645-86700-6



## EFFLORESCENCE & RUST REMOVER

Removes efflorescence salts, rust and hard water deposits from horizontal and vertical concrete, pavers, brick, masonry and stucco

- Use to remove efflorescence, rust and other stains from surface
- Ideal for use on concrete or paver patios and walkways, and masonry or stucco walls
- Renews concrete, masonry and paver surfaces
- No scrubbing required

Item No.	Package Size	Metric	Quantity	UPC
8675-33	1 gal	3.8 L	4/case	0-39645-86753-2



## CONCRETE & ASPHALT CLEANER - CONCENTRATE

A multi-purpose cleaner that is safe to use on any hard surface where water can be used. Use prior to any repair project to achieve the strongest bond. Non-toxic, non-flammable and contains no acid.

### Use For:

- Removing soil, grease, oil, etc. from all types of masonry, stucco concrete, mortar and grout

Item No.	Package Size	Metric	Quantity	UPC
8601-14	1 qt bottle	946 mL	12/case	0-39645-86011-3

**January 2000** Introduces  
“**QUIKRETE®** Makes It Easy” ad campaign



**January 2001** Introduces  
Concrete Resurfacer



**January 2003** Introduces  
project illustrations featured on product packaging





## CONCRETE & MASONRY WATERPROOFING SEALER - NATURAL LOOK

Water-based, penetrating, silane/siloxane sealer waterproofs and protects concrete, brick, masonry, pavers and stucco surfaces. Clear sealer does not change the surface appearance. Seals from water, salts and oils. UV Resistant. Interior or exterior use. Wait 30 days before applying to new concrete surfaces.

### Use For Sealing:

- Driveways
- Patios
- Stucco
- Block
- Walls
- Sidewalks
- Pavers
- Steps
- Floors
- Bricks

Item No.	Package Size	Metric	Quantity	UPC
8800-05	1 gal bottle	3.8 L	4/case	0-39645-88003-6
8800-07	5 gal pail	18.9 L	36/pallet	0-39645-88007-4



## CONCRETE & MASONRY HIGH GLOSS SEALER - WET LOOK

Water-based siliconized-acrylic clear sealer waterproofs, protects and enhances the color of concrete, masonry, brick, paver and natural stone surfaces. Seals from acids, grease, food stains, oil, salt and more. UV resistant. Interior or exterior use. Wait 30 days before applying to new concrete surfaces.

### Use For Sealing:

- Decorative concrete
- Exposed Aggregate
- Floors
- Pavers
- Brick
- Steps
- Natural Stone
- Stucco

Item No.	Package Size	Metric	Quantity	UPC
8800-06	1 gal bottle	3.8 L	4/case	0-39645-88004-3
8800-08	5 gal pail	18.9 L	36/pallet	0-39645-88008-1



## ACRYLIC CONCRETE CURE & SEAL - SATIN FINISH

Water-based, clear acrylic coating cures freshly placed concrete and seals concrete and masonry surfaces.

### Features and Benefits include:

- Eliminates the need for water curing freshly placed concrete.
- Protects and seals from acids, grease, oils, food stains, salt and more.

*Meets the requirements of ASTM C 309*

Item No.	Package Size	Metric	Quantity	UPC
8730-02	1 gal bottle	3.8 L	4/case	0-39645-87300-7
8730-03	5 gal pail	18.9 L	36/pallet	0-39645-87302-1



## PREMIUM CONCRETE BONDING ADHESIVE

Permanently bonds new concrete, plaster and stucco to existing concrete, plaster or stucco. Eliminates the need for roughening the surface before application.

### Use For:

- Bonding applications on concrete overlays 1 in or thicker
- Interior and exterior applications

*Meets the performance requirements of ASTM C 1059 Type I & II*

Item No.	Package Size	Metric	Quantity	UPC
9902-14	1 qt bottle	946 mL	12/case	0-39645-99021-6
9902-01	1 gal bottle	3.8 L	4/case	0-39645-99022-3
9902-05	5 gal pail	18.9 L	36/pallet	0-39645-99025-4



## CONCRETE ACRYLIC FORTIFIER

Acrylic resin admixture designed to enhance bonding and water resistance of concrete patching materials, stucco, surface bonding cement, thin-set mortars and tile grouts.

### Use To:

- Improve bonding to existing surfaces
- Eliminate moist curing in most circumstances
- Reduce permeability

*Meets the requirements of ASTM C 1438*

Item No.	Package Size	Metric	Quantity	UPC
8610-14	1 qt bottle	946 mL	12/case	0-39645-86101-1
8610-01	1 gal bottle	3.8 L	4/case	0-39645-86102-8
8610-05	5 gal pail	18.9 L	36/pallet	0-39645-86105-9



**January 2003** Introduces  
current **QUIKRETE®** logo & new packaging

**May 2003** Runs national TV ad  
featuring Concrete Resurfacer

**January 2006** Introduces  
Veneer Stone Mortar & FastSet™ DOT Mix






## LIQUID CEMENT COLORS

Mix with water and then add to dry concrete mix. One bottle will mix with two 80 lb or 60 lb bags of Concrete Mix. Available in Red, Brown, Buff, Charcoal and Terra Cotta.

### Use For:

- Adding color to WalkMaker projects
- Adding color to any concrete, mortar, sand topping or stucco project
- Provides permanent integral color

Meets the requirements of ASTM C 979



Item No.	Package Size	Metric	Quantity	UPC
<b>Charcoal</b>				
1317-00	10 oz bottle	296 mL	12/case	0-39645-13170-1
<b>Brown</b>				
1317-01	10 oz bottle	296 mL	12/case	0-39645-13171-8
<b>Buff</b>				
1317-02	10 oz bottle	296 mL	12/case	0-39645-13172-5
<b>Red</b>				
1317-03	10 oz bottle	296 mL	12/case	0-39645-13173-2
<b>Terra Cotta</b>				
1317-04	10 oz bottle	296 mL	12/case	0-39645-13174-9

## CONCRETE MIX ACCELERATOR

Add to concrete mix for faster set time. Use one to two boxes of accelerator per 60 lb (27.2 kg) bag of concrete mix.

### Use For:

- Fence and lamp post
- Piers
- Curbs
- Swing sets
- Basketball backboards



Item No.	Package Size	Metric	Quantity	UPC
9800-01	1.5 lb carton	.68 kg	24/case	0-39645-98000-2

## THERMO-LUBE®

Winter admixture. Reduces the time that the fresh concrete or mortar needs to be protected from freezing. Reduces set time and improves initial strength gain.

### Use In:

- Concrete and mortar in cold weather



Item No.	Package Size	Metric	Quantity	UPC
1905-01	1 gal bottle	3.8 L	4/case	0-39645-19051-7
1905-05	5 gal pail	18.9 L	36/pallet	0-39645-19055-5

## LIQUID STUCCO & MORTAR COLORS

Adds a decorative touch to stucco and mortar projects. Add to mixing water and then mix colored water with dry mix. Provides permanent integral color.

### Use with any of our mortar or stucco products including:

- QUIKRETE® Finish Coat Stucco
- Heavy Duty Masonry Coating
- One Coat Fiberglass Reinforced Stucco
- Mason Mix
- QUIKWALL®

20 colors available. Textured color chart available.



Item No.	Package Size	Metric	Quantity	UPC
1319	10 oz bottle	296 mL	12/case	Varies by color

Shell-00	Champagne-12	Cream-21	Ivory-02	Opal-14
Aspen-20	Sandstone-10	Wheat-15	Canyon-11	Palomino-04
Desert-16	Dune-03	Coral-09	Blush-19	Sage-18
Birch-17	Twilight-13	Charcoal-01	Pewter-06	Mocha-05

**January 2007** Introduces  
PowerLoc™ Jointing Sand



**2008**



80<sup>th</sup> Plant

**March 2008** Introduces  
Concrete Patching Compound & Countertop Mix





## FASTSET CONCRETE MIX

A rapid hardening concrete mix designed with a 20 to 30 minute set time, allowing for mixing, pouring and finishing. Use at any thickness from 1-1/2 in to 24 in.

### Use To Build or Repair:

- Street repairs
- Concrete parking lots
- Highways
- Concrete floors
- Bridge decks
- Sidewalks

### Compressive Strength ASTM C 39

3 Hours	3000 PSI	20.7 MPa
24 Hours	5000 PSI	34.5 MPa
7 Days	6000 PSI	41.3 MPa
28 Days	7000 PSI	48.3 MPa

Exceeds the requirements of ASTM C 928 R-3

Item No.	Package Size	Metric	Quantity	UPC
1004-51	70 lb bag	31.7 kg	42/pallet	0-39645-60361-1



## FASTSET REPAIR MORTAR

A low-sag repair mortar formula. Ideal for vertical & overhead repairs. 20 to 30 minute working time & unique properties allow sculpting of the material during placement.

### Use For Repairing:

- Pre-stress panels
- Retaining walls
- Tunnels
- Loading docks
- Bridge columns
- Curbs/steps

### Compressive Strength ASTM C 109 Modified

3 Hours	2000 PSI	13.8 MPa
24 Hours	4000 PSI	27.6 MPa
7 Days	5000 PSI	34.5 MPa
28 Days	6000 PSI	41.4 MPa

Exceeds the requirements of ASTM C 928 R-2

Item No.	Package Size	Metric	Quantity	UPC
1241-20	20 lb pail	9.1 kg	60/pallet	0-39645-12412-3
1241-50	50 lb pail	22.7 kg	each	0-39645-12419-2
1241-60	60 lb bag	27.2 kg	56/pallet	0-39645-60022-1



## FASTSET NON-SHRINK GROUT

For structural concrete repairs from 1/4 in to 24 in deep. 30 minute set time, non shrink characteristics & rapid strength gain. Can be mixed to a plastic, flowable or fluid consistency.

### Use For Anchoring & Grouting:

- Anchor bolts
- Steel column bases
- Bearing plates
- Floor leveling
- Pre-cast concrete keyways

### Compressive Strength ASTM C 109

Time	Fluid	Flowable	Plastic
3 Hours	2000 PSI (13.8 MPa)	2500 PSI (17.2 MPa)	3000 PSI (20.7 MPa)
24 Hours	4000 PSI (27.6 MPa)	4500 PSI (31.0 MPa)	5000 PSI (34.5 MPa)
7 Days	5000 PSI (34.5 MPa)	5500 PSI (37.9 MPa)	6000 PSI (41.3 MPa)
28 Days	6500 PSI (44.8 MPa)	7500 PSI (51.7 MPa)	8000 PSI (55.1 MPa)

Exceeds the requirements of ASTM C 928 R-3 and ASTM C 1107.

Item No.	Package Size	Metric	Quantity	UPC
1585-20	20 lb pail	9.1 kg	60/pallet	0-39645-15852-4
1585-50	50 lb pail	22.7 kg	each	0-39645-15851-7
1585-09	60 lb bag	27.2 kg	56/pallet	0-39645-60511-0



## NON-SHRINK PRECISION GROUT

High strength, non-metallic, non-shrink grout designed for precision grouting and general construction applications. Can be mixed to a plastic, flowable or fluid consistency.

### Use For:

- Grouting heavy equipment, pre-cast concrete, bearing plates, steel columns and anchoring applications

### Compressive Strength at 28 Days

Plastic	14,000 PSI	96.5 MPa
Flowable	12,000 PSI	86.2 MPa
Fluid	8,000 PSI	55.2 MPa

Meets the requirements of ASTM C 1107 and Army Corp. of Engineers CRD 621

Item No.	Package Size	Metric	Quantity	UPC
1585-00	50 lb bag	22.7 kg	64/pallet	0-39645-15855-5
1585-00	50 lb bag	22.7 kg	35/mini pallet	0-39645-15855-5

**January 2009** Introduces Base Coat Stucco - Pump Grade



**January 2009** Publishes Guide To Concrete, Masonry & Stucco Projects



**January 2010** Introduces Hardscapes by **QUIKRETE®**







## NON-SHRINK GENERAL PURPOSE GROUT

High strength, non-metallic Portland cement based grout including expansive additives. Can be mixed to a plastic, flowable or fluid consistency.

### Use For:

- Grouting, anchoring and general construction applications

### Compressive Strength at 28 Days

Plastic	10000 PSI	68.9 MPa
Flowable	9000 PSI	62.1 MPa
Fluid	8000 PSI	55.2 MPa

Meets the requirements of ASTM C 1107 and Army Corp. of Engineers CRD 621, tested at 70°F

Item No.	Package Size	Metric	Quantity	UPC
1585-01	50 lb bag	22.7 kg	64/pallet	0-39645-15850-0



## FIBER-REINFORCED DECK MIX & POLYMER MODIFIED FIBER-REINFORCED DECK MIX

Portland cement based, high-early strength 6000 PSI concrete mix. The fiber-reinforced and air-entrained formation provides improved freeze/thaw durability and crack resistance and contains an integral corrosion inhibitor.

### Use for:

- Parking structures
- Loading docks
- Roads
- Bridge decks
- Balconies
- Industrial floors

Item No.	Package Size	Metric	Quantity	UPC
<b>Fiber-Reinf</b> 1251-80	80 lb bag	36.2 kg	42/pallet	0-39645-12518-2
<b>Poly-Mod</b> 1251-81	80 lb bag	36.2 kg	42/pallet	0-39645-12519-9



## SHOTCRETE MS & SHOTCRETE MS-FIBER REINFORCED

Portland cement based structural repair material for making repairs to horizontal, vertical or overhead surfaces. The micro silica enhanced formulation provides high adhesion and very low rebound and permeability characteristics. Shotcrete MS is available in alkali-resistant fiberglass fiber, polypropylene fiber or steel fiber formulations.

### Use For Construction and Repair:

- Tunnels
- Foundations
- Structural concrete line
- Slope stabilization
- Bridge columns & beams
- Walls

Also available in 3000 lb. bulk bags.

\* Achieves 9000 PSI (MPa) at 28 days when field applied

Item No.	Package Size	Metric	Quantity	UPC
1229-80	50 lb bag	22.7 kg	64/pallet	0-39645-12298-3
1229-81	80 lb bag	36.2 kg	42/pallet	0-39645-12289-1
<b>Fiber-Reinf</b> 1228-51	50 lb bag	22.7 kg	64/pallet	0-39645-12286-0



## ARCHITECTURAL FINISH

Polymer modified, Portland cement based repair material designed to make smooth repairs to surface defects such as honey combs, bug-holes, spalls and chips.

### Use For:

- Tilt-up wall panels
- Pre-cast concrete
- Poured concrete
- Masonry surfaces

Item No.	Package Size	Metric	Quantity	UPC
1220-55	40 lb bag	18.1 kg	80/pallet	0-39645-12204-4



## FORM & POUR

High-flow, high-strength concrete mix designed for structural repairs to bridge, parking structures, tunnels, dams, concrete walls, industrial floors and filling voids in concrete. The material is air entrained (5% to 7%) and achieves a compressive strength of 6500 PSI when poured at a 7 in to 9 in slump and 8000 PSI when poured in a 4 in to 5 in slump.

Item No.	Package Size	Metric	Quantity
808100-65	80 lb bag	36.2 kg	42/pallet

**January 2010 QUIKRETE®**

celebrates 70th Anniversary  
with Rose Parade Float



**2010**



90<sup>th</sup> Plant

**January 2011** Introduces

QR Codes & full-color project photos featured  
on **QUIKRETE®** Repair Products





## FASTSET™ DOT MIX & FASTSET™ DOT MIX - EXTENDED

For structural concrete repair of bridge decks, roadways & parking decks from 1/2 in to 24 in (13 mm to 600 mm) thick. Can be extended with up to 25 lb (11.3 kg) of 3/8 in stone or gravel with a top size of up to 1/2 in (13 mm) for patches over 2 in (50 mm) thick. Achieves 3000 PSI (20.6 MPa) in 1 1/2 hours and 9000 PSI (62.0 MPa) in 28 days.

### Use For Anchoring & Grouting:

- Structural concrete repair
- Bridge decks
- Roadways
- Parking deck applications

*Exceeds the requirements of ASTM C 928 R-3*  
*Exceeds DOT region 3 requirements for exposure to de-icing chemicals*

Item No.	Package Size	Metric	Quantity	UPC
1244-56	55 lb bag	24.9 kg	64/pallet	0-39645-12415-4
<b>Extended</b>				
1244-80	80 lb bag	36.2 kg	42/pallet	0-39645-12447-5



## FASTSET™ POLYMER MODIFIED DOT MIX

Fiber reinforced, rapid-setting, very high-strength repair material designed for structural concrete repairs. Can be extended with up to 25 lb (11.3 kg) of ASTM C 33 size number 8 aggregate with a top size of up to 1/2 in (13 mm) for patches over 2 in (50 mm) thick. Achieves 3000 PSI (20.6 MPa) at 1 1/2 hours and 9000 PSI (62.0 MPa) at 28 days.

### Use For Anchoring & Grouting:

- Structural concrete repair
- Bridge decks
- Roadways
- Parking deck applications

*Exceeds the requirements of ASTM C 928 R-3*

Item No.	Package Size	Metric	Quantity	UPC
1244-54	55 lb bag	24.9 kg	64/pallet	0-39645-12415-4



## RAPID ROAD REPAIR® & RAPID ROAD REPAIR® - EXTENDED

Fast-setting, rapid-hardening structural repair mortar, designed to make pavement repairs to concrete pavement. Alkali-resistant fiber reinforced for improved flexural performance. Exceeds 3000 PSI (20.6 MPa) at 1 hour and 8300 PSI (57.5 MPa) at 28 days.

### Use For Repairing:

- Highways
- Bridge decks
- Runways
- Concrete footings
- Parking garages
- Driveways

*Exceeds the requirements of ASTM C 928 R-3*

Item No.	Package Size	Metric	Quantity	UPC
1242-51	50 lb bag	22.7 kg	64/pallet	0-39645-12420-8
<b>Extended</b>				
1242-80	80 lb bag	36.2 kg	42/pallet	0-39645-12427-7



## RIP RAP

Commercial grade blend of Portland cement and specially graded sand, packaged in a fiber reinforced, biodegradable bag for erosion control applications. Requires no mixing or equipment to install. The free-form construction method also allows for the elimination of forming and finishing procedures and is ideal for remote and accessible locations.

### Use For:

- Slopes
- Riverbanks
- Beaches
- Bulkheads
- Embankments
- Dams
- Seawalls
- Revetment
- Canals
- Lake fronts
- Culverts

Item No.	Package Size	Quantity
1129-60	60 lb bag	56/pallet
1129-80	80 lb bag	42/pallet
<b>SCRIM</b>		
1134-80	80 lb bag	42/pallet
<b>BURLAP</b>		
1129-60	60 lb bag	56/pallet
<b>POLY</b>		
1129-62	60 lb bag	56/pallet

**June 2011** Introduces project how-to videos, and establishes social media presence on Facebook & Twitter



**January 2012** Introduces polyurethane sealants, Zip & Mix™ Repair Mortar & anchoring epoxies



**September 2013** Introduces **QUIKRETE®** Concrete Coatings







## FAST-SETTING SELF-LEVELING FLOOR RESURFACER & SELF-LEVELING FLOOR RESURFACER

Self-finishing interior floor topping and underlayment specially formulated to produce a smooth surface ready for the installation of ceramic tile, resilient flooring or other finishes. No troweling required.

### Use For:

- Resurfacing existing concrete floors with damaged finishes
- Over new concrete floors & pre-cast slabs w/unacceptable finishes

### Fast-Setting formula exceeds:

1800 PSI (12.4 MPa) in 24 hours  
4000 PSI (27.6 MPa) in 7 days  
5500 PSI (37.9 MPa) in 28 days.

### Regular formula exceeds:

1000 PSI (6.9 MPa) in 7 days  
2000 PSI (13.8 MPa) in 28 days.

Item No.	Package Size	Metric	Quantity	UPC
<b>Fast-Setting</b>				
1249-51	50 lb bag	22.7 kg	64/pallet	0-39645-12491-8
<b>Regular</b>				
1249-50	50 lb bag	22.7 kg	64/pallet	0-39645-12495-6



## FAST-SETTING UNDERLAYMENT

A rapid hardening, high strength, non-shrink, blend of gypsum cement and graded sand designed to level concrete and wood floors. Trowel applied.

### Use For:

- Interior concrete and wood floors prior to the installation of ceramic tile, resilient flooring, carpet and other floor coverings

Meets the requirements of ANSI A 118-1

Item No.	Package Size	Metric	Quantity	UPC
1248-25	25 lb bag	11.3 kg	100/pallet	0-39645-12482-6



## THIN SET SANDED & THIN SET SANDED - WHITE

A Portland cement based thin set for setting absorptive & non-absorptive tile on walls and floors. Addition of Acrylic Fortifier is recommended.

### Apply Over:

- Plywood expanded metal lath
- Cementitious backer units
- Portland cement plaster
- Concrete
- Concrete block
- Wall board

Meets the requirements of ANSI A 118-1

Item No.	Package Size	Metric	Quantity	UPC
1547-50	50 lb bag	22.7 kg	63/pallet	0-39645-15475-5
<b>White</b>				
1547-51	50 lb bag	22.7 kg	63/pallet	0-39645-15476-2



## MULTI-PURPOSE THIN SET

A polymer modified, Portland cement based thin set used for setting ceramic tile and natural stone such as marble or granite and saltillo tile on walls and floors. Requires no additional latex or fortifiers. Available in gray and white.

### Apply Over:

- Plywood
- Cementitious backer units
- Portland cement plaster
- Concrete
- Concrete block
- Wall board

Meets the requirements of ANSI A 118-1 and ANSI A 118.4.

Item No.	Package Size	Metric	Quantity	UPC
<b>Gray</b>				
1550-49	50 lb bag	22.7 kg	63/pallet	0-39645-15505-9
<b>White</b>				
1550-50	50 lb bag	22.7 kg	63/pallet	0-39645-15506-6



## FLOOR MUD

Portland cement based underlayment mortar designed for leveling travertine, slate and marble floor tile, and for shower pan applications.

### Other Benefits and Features Include:

- Underlayment mortar, properly blended for leveling Travertine, Slate, Marble and Large Format Porcelain tiles.
- Offers low-sag to support heavy tiles.

Meets the requirements of ANSI A 108.1A, A 108.1B and A 108.1C

Item No.	Package Size	Quantity	UPC
1548-82	60 lb bag	56/pallet	0-39645-15488-5
1548-81	80 lb bag	42/pallet	0-39645-15487-8



## WALL FLOAT

Portland cement based leveling mortar for vertical applications of tile, marble and brick veneer. Addition of Acrylic Fortifier or Premium Concrete Bonding Adhesive is recommended.

Item No.	Package Size	Quantity	UPC
153-50	50 lb bag	65/pallet	0-39645-15350-5
153-76	75 lb bag	48/pallet	0-39645-15376-5

**February 2015** Introduces  
Q•MAX PRO Concrete Mix



**March 2015** Introduces  
**QUIKRETE®** Mobile App



**August 2016** Introduces  
New Products





## ONE COAT FIBERGLASS REINFORCED STUCCO

An alkali resistant fiberglass reinforced stucco designed for use in one-coat stucco applications. Available in a sanded version requiring only the addition of water or a concentrated version which requires the addition of clean plaster sand and water.

### Features & Benefits include:

- Crack resistant formula
- 1 hour fire rating over plywood or OSB & EPS foam when applied in accordance with ICC ESR-1240
- Superior workability
- Extended board life

Item No.	Package Size	Metric	Quantity	UPC
<b>Sanded</b>				
1200-80	80 lb bag	36.2 kg	42/pallet	0-39645-12008-8
<b>Concentrated</b>				
1216-80	80 lb bag	36.2 kg	42/pallet	0-39645-12168-9
1216-93	90 lb bag	40.8 kg	35/pallet	0-39645-21693-4



## BASE COAT STUCCO

A Portland cement based stucco used for construction and repair of stucco walls.

### Use For:

- Scratch and brown coat in a three coat stucco application
- Apply directly to masonry walls in a two coat stucco application
- Superior workability

*Meets the requirements of ASTM C 926 for cement based plaster*

Item No.	Package Size	Metric	Quantity	UPC
1139-81	50 lb bag	22.7 kg	56/pallet	0-39645-11395-0
1139-80	80 lb bag	36.2 kg	42/pallet	0-39645-11398-1
<b>Ext. Board</b>				
1139-87	80 lb bag	36.2 kg	42/pallet	0-39645-11397-4



## BASE COAT STUCCO-PUMP GRADE

A fiber reinforced contractor grade pre-blended Portland cement based scratch and brown coat stucco mix.

### Use For:

- Scratch and brown coat in a three coat stucco application
- Apply directly to masonry walls in a two coat stucco application
- May be spray or trowel applied

*Exceeds the requirements of ASTM C 926 for Portland cement based plaster*

Item No.	Package Size	Metric	Quantity	UPC
1139-86	80 lb bag	36.2 kg	42/pallet	0-39645-11393-6



## BASE COAT STUCCO with WATER-STOP

An exterior stucco with Water-Stop additive, used for the construction and repair of stucco walls. The Water-Stop, waterproofing additive prevents moisture penetration from wind driven rain.

### Use For:

- Scratch and brown coat in a three coat stucco application
- Apply directly to masonry walls in a two coat stucco application

*Meets the requirements of ASTM C 926 requirements for cement based plaster.*

Item No.	Package Size	Metric	Quantity	UPC
1139-89	80 lb bag	36.2 kg	42/pallet	0-39645-11399-8



## FINISH COAT STUCCO

A stucco finishing plaster designed for use as a color and texture coat over Portland cement base coat or QUIKRETE® Fiberglass Reinforced Stucco. Requires only the addition of water. Available in white or gray. Color can be added using QUIKRETE® Stucco & Mortar Color.

### Use For:

- A decorative color and texture finish coat for stucco
- 90 lb (40.5 kg) Finish Coat Stucco Available Regionally*

Item No.	Package Size	Metric	Quantity	UPC
<b>White</b>				
1201-80	80 lb bag	36.2 kg	42/pallet	0-39645-12018-7
1201-80	80 lb bag	36.2 kg	24/mini pallet	0-39645-12018-7
1201-91	90 lb bag	40.8 kg	35/pallet	0-39645-12026-2
<b>Gray</b>				
1202-80	80 lb bag	36.2 kg	42/pallet	0-39645-12028-6
1202-80	80 lb bag	36.2 kg	24/mini pallet	0-39645-12028-6
1201-92	90 lb bag	40.8 kg	35/pallet	0-39645-12027-9





## QUIKWALL® SURFACE BONDING CEMENT

An alkali resistant fiberglass reinforced, Portland cement based surface bonding cement used for construction of dry-stack (without mortar) cement block walls. Add color with QUIKRETE® Stucco & Mortar Color.

### Use For:

- Waterproofing and strengthening block walls without mortar
- Rehabilitating existing walls with a water-resistant & decorative coating
- Construction of structural and non-structural walls

*Meets the requirements of ASTM C 887*

Item No.	Package Size	Metric	Quantity	UPC
<b>White</b>				
1230-50	50 lb bag	22.7 kg	64/pallet	0-39645-12305-8
1230-50	50 lb bag	22.7 kg	35/mini pallet	0-39645-12305-8
<b>Gray</b>				
1231-50	50 lb bag	22.7 kg	64/pallet	0-39645-12315-7
1231-50	50 lb bag	22.7 kg	35/mini pallet	0-39645-12315-7
<b>Unsanded</b>				
1220-50	50 lb bag	22.7 kg	64/pallet	0-39645-12205-1



## FASTSET™ STUCCO PATCH

Fast setting, polymer modified, Portland cement-based stucco patching material formulated to provide water repellency, minimal shrinkage and improved durability.

- Apply fine finish to full-depth stucco repairs
- 20 to 30 minute working time
- Can be painted after 90 minutes

*Meets requirements of ASTM C 926*

Item No.	Package Size	Metric	Quantity	UPC
1139-92	20 lb pail	9.1 kg	60/pallet	0-39645-11400-1



## PRE-MIXED STUCCO PATCH

Ready-to-use acrylic latex formula for making repairs to cracks, breaks and holes up to 1/4 in thick in stucco surfaces.

- Dries to a durable and flexible finish
- Sanded formula blends with the texture of surrounding stucco

Item No.	Package Size	Metric	Quantity	UPC
8650-32	1 qt pail	.95 L	24/case	0-39645-86503-3





## PREMIUM PLAY SAND®

Specially graded fine sand that has been washed, dried and screened.

### Use For:

- Children's sand boxes
- Molding and building



## ALL-PURPOSE SAND

Washed, properly graded coarse sand with multiple uses. Color varies by market.

### Use For:

- Underlayment for brick pavers and flagstone
- Increasing traction on snow and ice
- Mixing with potting soil or for use in other garden applications
- Mixing with Portland cement and gravel to make concrete mix

Meets ASTM C 33 specifications



## ALL-PURPOSE GRAVEL

Multi-use product for a variety of decorative and landscaping applications. Also for making concrete. Washed, properly graded gravel. Color varies by market.

### Use For:

- Landscaping, gardening, patios, tree wells, walks, rooftops, fish ponds and aquariums
- Mix with Portland cement & all purpose sand to make concrete mix

Meets ASTM C 33 specifications.



## POWERLOC® JOINTING SAND

A polymer-modified graded sand for filling between interlocking pavers, brick, patio blocks and concrete slabs up to 1/2" (12.7 mm) wide. Once swept into the paver joints & dampened with a water mist it hardens, locking pavers into place. Also available in a dark color.

### Features & Benefits Include:

- Resists erosion
- Contains safe organic binder
- Stabilizes pavers
- Resists weed growth & insects
- Non-staining
- Environmentally friendly



## PATIO PAVER BASE SAND

Underlayment base sand used to provide a firm, stable base, for interlocking pavers, flagstone, brick and patio block.

### Use For:

- Driveways
- Walkways
- Patios



## PATIO PAVER JOINTING SAND

Properly graded fine sand for filling joints between interlocking pavers, flagstone, brick & patio block.

### Use For:

- Driveways
- Walkways
- Patios



## COMMERCIAL GRADE SAND

Consistently graded washed and kiln dried sand with multiple industrial and construction applications.

### Use For:

- Underlayment for brick pavers and flagstone
- Epoxy and industrial coatings
- Specialized cement mixes

Item No.	Package Size	Metric	Quantity	UPC
1113-51	50 lb bag	22.7 kg	56/pallet	0-39645-11135-2

Item No.	Package Size	Metric	Quantity	UPC
1152-51	50 lb bag	22.7 kg	56/pallet	0-39645-11525-1
1152-70	70 lb bag	31.7 kg	42/pallet	0-39645-11527-5
<b>Poly-woven</b>				
1152-60	60 lb bag	27.2 kg	56/pallet	0-39645-11523-7

Item No.	Package Size	Metric	Quantity	UPC
1151-50	50 lb bag	22.7 kg	56/pallet	0-39645-11515-2

Item No.	Package Size	Metric	Quantity	UPC
1150-47	50 lb bag	22.7 kg	56/pallet	0-39645-11502-2
<b>Dark</b>				
1150-37	50 lb bag	22.7 kg	56/pallet	0-39645-11501-5

Item No.	Package Size	Metric	Quantity	UPC
1150-49	50 lb bag	22.7 kg	56/pallet	0-39645-11504-6

Item No.	Package Size	Metric	Quantity	UPC
1150-59	50 lb bag	22.7 kg	56/pallet	0-39645-11508-4

Item No.	Package Size	Metric	Quantity	UPC
<b>Fine</b>				
1961-52	50 lb bag	22.7 kg	56/pallet	0-39645-96152-0
1961-02	100 lb bag	45.4 kg	30/pallet	0-39645-96102-5
<b>Medium</b>				
1962-51	50 lb bag	22.7 kg	56/pallet	0-39645-96251-0
1962-01	100 lb bag	45.4 kg	30/pallet	0-39645-96201-5
<b>Coarse</b>				
1963-03	50 lb bag	22.7 kg	56/pallet	0-39645-96303-6
1963-01	100 lb bag	45.4 kg	30/pallet	0-39645-96301-2





## POOL FILTER SAND

Properly graded clean silica sand.

### Use For:

- Swimming pool filtration systems
- 20/40 gradation

Item No.	Package Size	Metric	Quantity	UPC
1153-50	50 lb bag	22.7 kg	56/pallet	0-39645-11535-0



## MASON SAND

A washed, properly graded, fine masonry sand.

### Use For:

- Mix with QUIKRETE® Portland Cement & Hydrated Lime or QUIKRETE® Masonry Cement to make Mortar Mix
- Fill joints between patio pavers, bricks or stone
- Mix with potting soil or use for other garden applications

Item No.	Package Size	Metric	Quantity	UPC
1961-56	50 lb bag	22.7 kg	56/pallet	0-39645-19525-3



## WASHED PLASTER SAND

A washed, properly graded, coarse plaster sand.

### Use For:

- Mix with QUIKRETE® Portland Cement & Hydrated Lime - Type S or with QUIKRETE® Plastic Cement to make Base Coat Stucco
- Mix with potting soil or use for other garden applications

*Meets ASTM C 897 specifications*

*Contains approx. 1/2 cu. ft. (14.2 L) of sand by volume*

Item No.	Package Size	Metric	Quantity	UPC
1152-58	50 lb bag	22.7 kg	56/pallet	0-39645-11529-9



## ATHLETIC FIELD MARKER

Pulverized white limestone or marble used for marking athletic fields.

Item No.	Package Size	Metric	Quantity	UPC
1954-00	50 lb bag	22.7 kg	56/pallet	0-39645-19540-6

## LIME PRODUCTS



## HYDRATED LIME - TYPE S

For use in building construction. Can be mixed with Portland cement and other ingredients to make mortar mix and base coat stucco.

*Meets the requirements of ASTM C 207, Type S Hydrated Lime for masonry purposes*

Item No.	Package Size	Metric	Quantity
9907-53	50 lb. ba	22.7 kg	50/pallet



## AGRICULTURAL LIME

Calcium Carbonate used to neutralize soil acidity

*Available Regionally*

Item No.	Package Size	Metric	Quantity
1111-50	50 lb bag	22.7 kg	56/pallet

# HardScapes

by **QUIKRETE®**



## STONES, PEBBLES & ROCK

Stone, pebbles and rocks for landscaping.

### Use For:

- Controlling erosion
- Resisting decay
- Decorative features

### Packaging Elements:

- Quantity Calculators
- Bilingual
- Product Descriptions
- Heavy Duty Bags
- Size 0.5 ft³
- UV Resistant

### Rock Varieties:

- Red Lava Rock
- Pond Pebbles
- Marble Chips
- River Pebbles
- Crushed Rock
- All-Purpose Stone
- Pea Pebbles

## STONES, PEBBLES & ROCK

Item No.	Package Size	Metric	Quantity	UPC
<b>Marble Chips</b> 1175-00	0.5 ft³	.014 m³	63/pallet	0-39645-11750-7
<b>Red Lava Rock</b> 1175-05	0.5 ft³	.014 m³	63/pallet	0-39645-11751-4
<b>Pea Pebbles</b> 1175-10	0.5 ft³	.014 m³	63/pallet	0-39645-11752-1
<b>River Pebbles</b> 1175-15	0.5 ft³	.014 m³	63/pallet	0-39645-11753-8
<b>All-Purpose Stone</b> 1175-20	0.5 ft³	.014 m³	63/pallet	0-39645-11754-5
<b>Pond Pebbles</b> 1175-25	0.5 ft³	.014 m³	63/pallet	0-39645-11755-2



## POLYMERIC JOINTING SAND

A polymer-modified graded sand for filling joints up to 2 in wide between interlocking pavers, brick, natural stone and concrete slabs. Once swept into the paver joints & dampened with a water mist it hardens, locking pavers into place.

### Features & Benefits Include:

- Resists erosion
- Resists weed growth & insects
- Commercial or Residential Use
- Stabilizes pavers

## STABILIZING SAND

Item No.	Package Size	Metric	Quantity	UPC
1175-56	50 lb bag	22.7 kg	64/pallet	0-39645-11749-1



## PAVER BASE

Paver base provides a firm, stable foundation for interlocking pavers, flagstone, bricks or patio block.

### Use As a Base For:

- Pavers
- Concrete slabs
- Walkways



## PAVER SAND

A properly graded fine sand used to fill joints between interlocking pavers, flagstone, bricks or patio block.

### Use For:

- Patios
- Walkways
- Driveways



## PLAY SAND

Specially graded washed sand.

### Ideal For:

- Childrens' sand boxes
- Molding
- Safe surface for playground



## ALL-PURPOSE SAND

Washed, properly graded coarse sand with multiple uses including, paver underlayment, soil and garden applications and mixing with cement.

### Ideal For:

- Pavers
- Soil & garden
- Mixing with cement

## SPECIALTY SANDS

Item No.	Package Size	Metric	Quantity	UPC
1175-45	0.5 cu ft	.014 cu m	63/pallet	0-39645-11759-0

Item No.	Package Size	Metric	Quantity	UPC
1175-40	0.5 cu ft	.014 cu m	63/pallet	0-39645-11758-3

Item No.	Package Size	Metric	Quantity	UPC
1175-50	0.5 cu ft	.014 cu m	63/pallet	0-39645-11760-6

Item No.	Package Size	Metric	Quantity	UPC
1175-35	0.5 cu ft	.014 cu m	63/pallet	0-39645-11757-6





## TRANSLUCENT CONCRETE STAINS

Semi-translucent appearance highlights the natural variations in concrete and masonry surfaces. Translucent Concrete Stain can be used in multiple color combinations to achieve a unique multi-tone, layered appearance.

- Does not peel
- Interior or exterior use
- Low odor & Low VOC
- Water based, Polymer-Bonded, UV Resistant formula
- Matte finish
- Ideal for garage floors, driveways, pool decks, sidewalks & patios



## PENETRATING CONCRETE STAINS

Opaque appearance provides deep, rich color that is highlighted by the natural variations of concrete and masonry surfaces.


- Matte finish
- Penetrating Stain does not peel
- Low odor & Low VOC
- Water based, Polymer-Bonded, UV Resistant formula
- Interior or exterior use
- Ideal for floors, driveways, sidewalks & patios



## CONCRETE ETCHING STAINS

Transforms plain concrete into a marble-like appearance with warm earth tones and unique shading. The acid-based stain react with the cement as they penetrate the surface, creating a permanent effect.

- Use on new or existing concrete
- Interior or exterior use
- Permanently stains concrete in one step
- Creates unique, decorative, multi-toned appearance
- Ideal for interior rooms, patios, porches & driveways

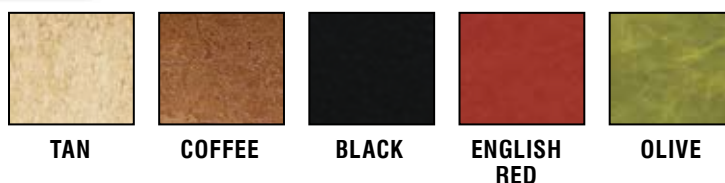

Item No.	Package Size	Metric	Quantity	UPC
<b>Red</b>				
7215-00	1 gal	3.8 L	4/case	0-39645-72150-6
<b>Terra Cotta</b>				
7215-01	1 gal	3.8 L	4/case	0-39645-72151-3
<b>Cola</b>				
7215-02	1 gal	3.8 L	4/case	0-39645-72152-0
<b>Light Brown</b>				
7215-04	1 gal	3.8 L	4/case	0-39645-72154-4
<b>Light Gray</b>				
7215-03	1 gal	3.8 L	4/case	0-39645-72153-7
<b>Blue</b>				
7215-05	1 gal	3.8 L	4/case	0-39645-72155-1
<b>Golden Wheat</b>				
7215-07	1 gal	3.8 L	4/case	0-39645-72157-5
<b>Brick Red</b>				
7215-06	1 gal	3.8 L	4/case	0-39645-72156-8

Item No.	Package Size	Metric	Quantity	UPC
<b>Charcoal</b>				
7215-16	1 gal	3.8 L	4/case	0-39645-72159-9
<b>Gray</b>				
7215-15	1 gal	3.8 L	4/case	0-39645-72158-2
<b>Walnut Brown</b>				
7215-17	1 gal	3.8 L	4/case	0-39645-72160-5
<b>Burnt Orange</b>				
7215-18	1 gal	3.8 L	4/case	0-39645-72161-2

Item No.	Package Size	Metric	Quantity	UPC
<b>Tan</b>				
7215-25	1 gal	3.8 L	4/case	0-39645-72162-9
<b>Coffee</b>				
7215-26	1 gal	3.8 L	4/case	0-39645-72163-6
<b>Black</b>				
7215-27	1 gal	3.8 L	4/case	0-39645-72164-3
<b>English Red</b>				
7215-28	1 gal	3.8 L	4/case	0-39645-72165-0
<b>Olive</b>				
7215-29	1 gal	3.8 L	4/case	0-39645-72166-7



## COMMERCIAL GRADE PERMANENT BLACKTOP REPAIR

High performance asphalt cold patch specially formulated for permanent repairs to potholes and cracks over 1 inch (25 mm) wide in asphalt pavement. DOT Approved formula. Stays pliable in cold weather applications.

- Use all-year-round in wet or dry conditions
- Can be used in hot or cold weather
- Provides superior bond strength
- Does not require heating or mixing, pour directly out of bag
- Can be formed and compacted
- Patched area is ready for immediate use
- Very Low VOC formula - Meets all state requirements



## ASPHALT COLD PATCH - 90% RECYCLED MATERIALS

High performance cold patch containing recycled materials and special binder additives. Environmentally friendly formula permanently bonds to surrounding asphalt pavement.

*Available Regionally*

### Other Features & Benefits Include:

- No odor/very low VOC
- Repair area is ready for immediate use
- No heating or mixing required

*Meets Air Quality Standards of AQMD Rule 1108*



## ACRYLIC BLACKTOP REPAIR

A weather-resistant crack-filler, provides excellent adhesion and minimal shrinkage. Helps prevent water and ice damage to blacktop surfaces. Dries to a textured black finish. Non-flammable.

### Use For:

- Repairing cracks in blacktop and asphalt surfaces including driveways, roofs and chimney flashings



## BLACKTOP CRACK SEAL

A uniformly blended latex emulsion, specifically designed to adhere to asphalt and concrete surfaces. No mixing is required. Just pour from the bottle. Black color blends with surrounding surface.

### Use For:

- Repairing cracks in blacktop and asphalt surfaces

Item No.	Package Size	Metric	Quantity	UPC
1701-59	50 lb bag	22.7 kg	63/pallet	0-39645-17015-1

Item No.	Package Size	Metric	Quantity	UPC
1701-58	50 lb bag	22.7 kg	63/pallet	0-39645-17017-5

Item No.	Package Size	Metric	Quantity	UPC
8630-15	5.5 fl oz tube	163 mL	12/case	0-39645-86301-5
8630-10	10 fl oz tube	296 mL	12/case	0-39645-86300-8

Item No.	Package Size	Metric	Quantity	UPC
8640-05	1 qt	946 mL	12/case	0-39645-86405-0
8640-06	1 gal	3.8 L	4/case	0-39645-86406-7

# CONCRETE & MASONRY COATINGS



## MASONRY WATERPROOFER

Beautifies and waterproofs porous concrete and masonry surfaces.

- Heavy duty resin technology delivers maximum adhesion and a water-tight barrier
- Resists surface mold and mildew
- Ideal for basement walls, foundations and other porous surfaces
- Can be applied by roller or brush
- Ready-to-use
- Color: Bright White



## TEXTURED ACRYLIC CONCRETE COATING

Textured acrylic coating provides a non-slip, new look finish to concrete surfaces.

- Provides a consistent color and new look finish to old worn concrete surfaces
- Heavy duty resin technology provides superior adhesion to concrete surfaces
- Ideal for steps, sidewalks, driveways and patios
- Ready-to-use



Item No.	Package Size	Metric	Quantity	UPC
8610-09	1 gal	3.8 L	4/case	0-39645-86100-4
8610-29	5 gal	18.9 L	each	0-39645-86110-3

Item No.	Package Size	Metric	Quantity	UPC
<b>Gray</b>				
8730-06	1 gal	3.8 L	4/case	0-39645-87307-6
8730-07	5 gal	3.8 L	Each	0-39645-87308-3
<b>Mocha</b>				
8730-36	1 gal	3.8 L	4/case	0-39645-87314-4
8730-37	5 gal	3.8 L	Each	0-39645-87315-1
<b>Sedona Red</b>				
8730-16	1 gal	3.8 L	4/case	0-39645-87309-0
8730-17	5 gal	3.8 L	Each	0-39645-87311-3
<b>Cool Gray</b>				
8730-26	1 gal	3.8 L	4/case	0-39645-87312-0
8730-27	5 gal	3.8 L	Each	0-39645-87313-7





**GARAGE FLOOR COATING**

An advanced formula, water-based epoxy formulated for long lasting performance as a garage floor coating. Protects against oil, grease and chemicals.


- Showroom high gloss finish with exceptional durability
- Superior adhesion eliminates hot tire pickup
- 1 car kit covers up to 250 sq ft

**Kit Includes:**

- 2 part epoxy
- Cleaner, Etcher & Degreaser
- Application instructions
- Color flakes
- Stir stick



Item No.	Package Size	Metric	Quantity	UPC
<b>Gray</b>	KIT			
0703-57	120 fl oz	3.6 L	EACH	0-39645-07036-9
<b>Tan</b>	KIT			
0703-58	120 fl oz	3.6 L	EACH	0-39645-07037-6



**Gray**



**Tan**



**EPOXY HIGH-GLOSS COATING**

Clear, advanced formula, water-based epoxy formulated for long lasting performance as a garage floor protective coating. For use on bare or coated concrete.

- Provides superior chemical resistance & durability
- High solids, clear protective coating
- One kit covers up to 500 sq ft of coated concrete

**Kit Includes:**

- 2 part epoxy
- Stir stick
- Anti-Skid additive
- Application instructions



Item No.	Package Size	Metric	Quantity	UPC
0703-55	KIT 120 fl oz	3.6 L	EACH	0-39645-07035-2


**COLOR FLAKES**

Add a custom touch to your Garage Floor Coating project. Available for both Gray and Tan coatings, Color Flakes give depth to newly coated surfaces.

- Custom appearance
- Available for Gray and Tan
- Add as little or as much as you like



**Blue Blend added  
to Gray Garage  
Floor Coating**



**Tan Blend added  
to Tan Garage  
Floor Coating**



## QUIK-TUBE® BUILDING FORMS

Rigid fiber building form tube eliminates the need to build wood forms. Available regionally in 10 ft & 12 ft lengths.

### Use For:

- Mailbox bases
- Deck supports
- Columns

Item No.	Package Size	Metric	Quantity	UPC
6922-01	8 in dia x 4 ft h	20 cm x 1.2 m	36/tray	0-39645-69221-9
6922-02	10 in dia x 4 ft h	25.4 cm x 1.2 m	24/tray	0-39645-69222-6
6922-03	12 in dia x 4 ft h	30.5 cm x 1.2 m	18/tray	0-39645-69223-3



## EXPANSION JOINT STRIPS

Expansion joint filler made from resilient cane fibers used to prevent damage during expansion and contraction of concrete. Weather resistant.

### Use for:

- Driveways, sidewalks and patios
- Between concrete slabs and to separate slabs from structures

Meets the requirements of ASTM D 1751

Item No.	Package Size	Metric	Quantity	UPC
6917-03	½ in x 4 in x 5 ft	12.7 mm x 1.5 m	40/carton	0-39645-69171-7
6917-04	½ in x 4 in x 10 ft	12.7 mm x 3 m	40/carton	0-39645-69173-1



## WALKMAKER BUILDING FORM - COUNTRY STONE PATTERN

Reusable plastic mold in cobblestone pattern. Fill the mold with 80 lb of Concrete Mix, trowel, and remove the mold.

For best results, use QUIKRETE® Crack Resistant Concrete.


### Use For:

- Creating cobblestone patterned paths, patios, courtyards, etc.
- Add color to concrete mix with QUIKRETE® Liquid Cement Color (No. 1317)

### Available in:

Charcoal, Buff, Red, Brown, & Terra Cotta

Item No.	Package Size	Metric	Quantity	UPC
6921-32	2 ft x 2 ft	.6 m x .6 m	12/case	0-39645-69210-3



## WALKMAKER BUILDING FORM -

- RUNNING BOND BRICK PATTERN
- EUROPEAN BLOCK PATTERN
- BASKET WEAVE PATTERN

Reusable plastic molds. Fill the mold with 80 lb of Concrete Mix, trowel, and remove the mold.

For best results, use QUIKRETE® Crack Resistant Concrete.

### Use For:

- Creating brick patterned paths, patios, courtyards, etc.
- Add color to concrete mix with QUIKRETE® Liquid Cement Color (No. 1317)

### Available in:

Charcoal, Buff, Red, Brown, & Terra Cotta

Item No.	Package Size	Metric	Quantity	UPC
<b>Brick Bond</b> 6921-33	2 ft x 2 ft	.6 m x .6 m	12/case	0-39645-69212-7
<b>Euro Block</b> 6921-34	2 ft x 2 ft	.6 m x .6 m	12/case	0-39645-69217-2
<b>Brick Weave</b> 6921-35	2 ft x 2 ft	.6 m x .6 m	12/case	0-39645-69230-1



## GUIDE TO CONCRETE BOOK

The QUIKRETE® GUIDE TO CONCRETE book provides practical instructions and clear step-by-step photos to help accomplish the most popular projects and repairs made with concrete, masonry and stucco products.

### Other Benefits and Features Include:

- Full color step-by-step project photography
- Detailed descriptions, quantity calculators and lists of tools and materials needed for projects
- At-a-glance project information
- Helpful hints & insight designed to make projects run smoothly from start to finish
- Free-standing counter display case

Item No.	Package Size	Quantity	UPC
6924-07	1 case	12/case	0-39645-69240-0







## ROCK SALT - Graded Coarse Natural Salt

### Use for:

- For melting ice and snow on stairs sidewalks, driveways, etc.

Item No.	Package Size	Metric	Quantity	UPC
9002-25	25 lb bag	11.3 kg	100/pallet	0-39645-90022-2
9002-50	50 lb bag	22.7 kg	56/pallet	0-39645-90025-3
9002-80	80 lb bag	36.2 kg	30/pallet	0-39645-90028-4



## ICE DEVIL & ICE DEVIL EF

### Ice Devil®

- Melts ice down to -10 °F (-23 °C)
- Blended for quick melting results
- Residential & commercial use
- Contains MgCL and NaCL

### Ice Devil® EF

- Melts ice down to 0 °F (-18 °C)
- Safer on landscaping
- Easier on concrete surfaces
- Contains KCL, liquid MgCL, & NaCL
- Contains color tracker
- Non-staining and non-tracking

*\*Can be used before or during ice and snow storms to prevent excessive bonding of ice and snow to concrete or pavement  
Available Regionally*

Item No.	Package Size	Metric	Quantity	UPC
9004-80	50 lb bag	22.7 kg	56/pallet	0-31187-02050-5
<b>EF</b>				
9004-79	25 lb bag	11.3 kg	56/pallet	0-39645-90074-5
9004-83	50 lb bag	22.7 kg	42/pallet	0-31187-02150-2



## TRACTION SAND

A dry, coarse sand, ideal for traction on all surfaces in icy conditions.

### Use For:

- Traction on icy and snow-covered surfaces
- Added vehicle weight

Item No.	Package Size	Metric	Quantity	UPC
1158-51	50 lb bag	22.7 kg	56/pallet	0-39645-11585-5



## TUBE SAND

Tube-shaped bag fits along side rear axle, above wheel wells or in bed of pick-up trucks.

### Use For:

- Traction and vehicle weight for winter driving conditions
- UV resistant woven-poly bag

Item No.	Package Size	Metric	Quantity	UPC
1159-60	60 lb bag	27.2 kg	42/pallet	0-39645-11596-1



The **QUIKRETE**® Company continues to add manufacturing locations to better serve you with high performance products. With more than 100 locations throughout The United States, Puerto Rico, Canada, Central and South America, The **QUIKRETE**® Company is unsurpassed in our ability to provide efficient and expedient delivery.

**QUIKRETE**®  
**CEMENT & CONCRETE PRODUCTS™**

The **QUIKRETE**® Companies  
 3490 Piedmont Road, Suite 1300  
 Atlanta, GA 30305

800.282.5828

[www.QUIKRETE.com](http://www.QUIKRETE.com)